Russound®

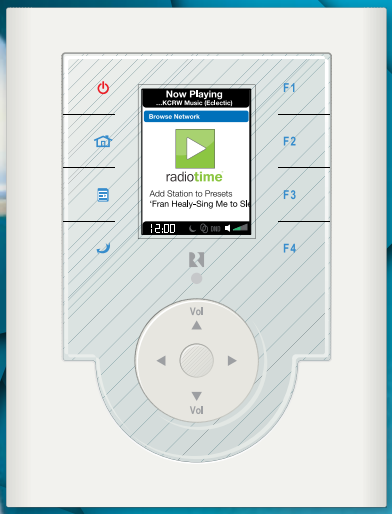

2010 International Catalog

FALL

Table of Contents

Product Showcase ——————— 3

Multiroom Audio Systems

Collage® System ——————— 4
C-Series System ——————— 5—7
CAA Systems ——————— 8—9
CAS Systems ——————— 10—11
CA4 Systems ——————— 12
A-BUS® Systems ——————— 13—16

Source Equipment

Smart Media Servers ——————— 17
Smart Dual Tuners ——————— 17
iBridge Systems ——————— 17
Video Distribution ——————— 18

Loudspeakers and Amplifiers

Acclaim® Speakers ——————— 19—24
Rough-in Speaker Brackets ——— 25
Flexbox Back Boxes ——————— 25
R-Series Amplifiers ——————— 26
X-Series Amplifiers ——————— 27

Impedance Matching

Volume Controls ——————— 28—29
Speaker Selectors ——————— 30

Intercom Systems

ComPoint® Intercom system — 31—32

IR Systems

SaphIR® systems ——————— 33—35

Accessories

PlateMate ——————— 36—40
System Accessories ——————— 41

Warranty ——————— 42
Gold Guarantee ——————— 42
Return Policy ——————— 42
Agency Compliance and Certification 42

Hello from Russound

As our industry adjusts to changes in the economy, home sales and even how people listen to music, we at Russound continue to deliver products designed to grow our customers' business.

We have refined our product offerings to make certain we are providing solutions that fit in new construction, remodeling or retrofit applications. Our full line of products continue to provide valuable, useful solutions for all of your customers needs.

To accomplish this, here are some examples of what we are doing.

The new X-Series amplifiers are perfect for dual source amplification with A/B speaker switching, front-panel volume and balance controls, and signal-sensing inputs, at an attractive price point. The three models are X75, X125 and X225.

We are making great gains in our goal of product energy efficiency and green packaging. Our newest controller, the MCA-C3, meets strict European power requirements at less than 1 watt power draw in standby mode. And it is packaged using recycled cardboard and pulp paper with no Styrofoam.

Our new D250LS amplifier also meets the 1-watt power draw requirement. This two-channel local source digital amplifier features a front panel cosmetic that matches the C-Series controllers, and can be installed as a pair using only one rack unit of space thanks to the innovative optional mounting kit.

Take a moment to explore our product guide. You'll find a balance of products from complete multiroom system to speakers, sources and accessories. We have done our best to supplement our products with new offerings that help improve any multiroom experience. If you have any questions about our products or systems, please feel free to give us a call. We're here to help.

Sincerely,

Charlie Porritt
CEO

Visit our Reseller Portal at:
http://www.russound.com/portal

Place and track orders, access transaction history, and view up-to-date business and technical information 24/7.

New C-Series Controller

The MCA-C3 is the latest addition to the successful C-Series line of controllers. Flexible, expandable and intuitive, the MCA-C3 delivers complete control over six zones and six sources in a chassis that is EuP compliant for 1-watt standby power consumption. Other features include an internal AM/FM tuner with RDS, programming over Ethernet via SCS-C5 and third party control supported by RIO Text and RS232 hex protocols.

NEW

New R-Series Amplifier

NEW

The D250LS is a 2-channel power amplifier with automatic local source switching. It's designed to complement the C-Series line of controllers, with its matching faceplate and power support of zones 7 or 8. It is rated at 50 watts per channel and can be bridged for 150 watts of power into a single 8-ohm load. Digital amplification makes it EuP compliant for 1-watt standby power consumption, and an optional rack mount kit supports two D250LS amps in 1U space.

New X-Series Amplifiers

NEW

NEW

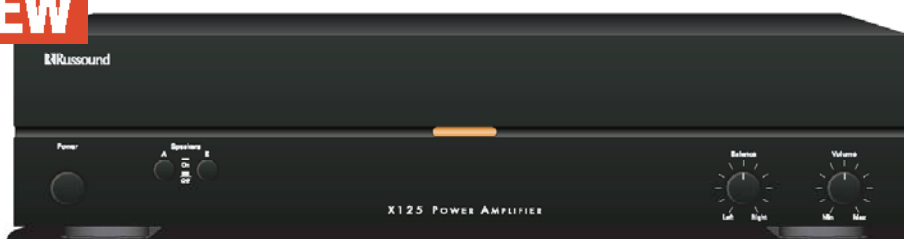

NEW

Russound's X-Series line of two-channel stereo amplifiers deliver performance and features in a flexible package. Featuring signal-sensing inputs, front mounted volume and balance controls, bridgeable outputs, and A/B speaker switching, the X-Series make dual source amplification easy and affordable. The X-Series is comprised of three models, the X75, X125 and X225.

Collage® Powerline Media and Intercom System

Collage Powerline Media and Intercom System

Innovative. Intuitive. Affordable.

Retrofit is now Retro*quick*

The Russound Collage Powerline Media and Intercom system uses existing electrical wiring to stream music throughout a home. Zones can be installed anywhere near electrical control fixtures, for unobtrusive retrofit solutions that are a breeze to install.

More Choices. No Limits.

Access network attached music, online music services, and communicate between keypads. In addition to a built-in FM tuner, a free 6 month subscription to Rhapsody™ online music service gives you 8 million songs and three independent streams of music.

Rhapsody radiotime what's on radio HOMEPLUG POWERLINE ALLIANCE

* Rhapsody music services is available in the US only.

Collage System Components

Collage Amplified Keypad

Features a high-resolution VGA display for viewing system and source information, or feeds from CCTV cameras. The capacitive touch buttons and scroll wheel provide easy, intuitive navigation of sources and networked stored music. A built-in microphone allows for zone-to-zone intercom communication and room monitoring. Internal FM tuner. 15 Watts per channel @ 8 Ohms, 4 Ohm load.

2920-531309: CAK1 White
2920-531316: CAK1 Black



Collage Remote Control

12 button remote that provides access to Collage system keypad presets and functions, including alarm and sleep timer.

2920-531354: CRC1



Collage Keypad Conversion Kit

2920-531699: CAK1 Almond
2920-531682: CAK1 White
2920-531705: CAK1 Black

Collage Media Manager

Provides the network to host up to 10 Collage Amplified Keypads. It can broadcast up to 3 independent stream of digital music from a local area network or the internet.

2920-531323: CMM1
2920-533365: CMM1 AU

Collage System Peripherals

Engineered using Gridcast™ technology, the Collage Dock and Source Bridge and their source equipment can be located anywhere in a home where electrical wiring is run.

Coming Soon

Collage Dock

The Collage Dock allows the integration of an iPod as an audio source within a Collage Powerline Media and Intercom system. The Dock supplies information about the song, artist, album, genre and playlist to the Collage Amplified Keypad screen while keeping the iPod charged and ready to go.

2920-531330: CPD1
2920-533389: CPD1 AU, Black
2920-533396: CPD1 AU, White

Coming Soon

Collage Source Bridge

The Collage Source Bridge provides an access point for connecting legacy audio and video products to a Collage Powerline Media and Intercom system. Featuring stereo RCA and S/PDIF digital audio inputs, a composite video input, as well as an IR emitter port, the Source Bridge allows for connection and control of CD changers or CCTV video cameras.

2920-531347: CSB1
2920-533402: CSB1 AU

C-Series Multiroom Controller Amplifier System

C-Series MCA-C5 System

Includes

(1) MCA-C5 controller
(6) MDK-C5 system keypads
(1) SRC-C5 Remote control
(1) AM Antenna
(1) FM Antenna
(1) Pair rack ears
(6) 845.1 IR Emitters

White & Almond Wall plates and rack ears included

1550-531125: KT1-C5
1550-531149: KT1-C5 EU
1550-531132: KT1-C5 UK
Shipping Weight
38.35 lbs. (17.4 kg)

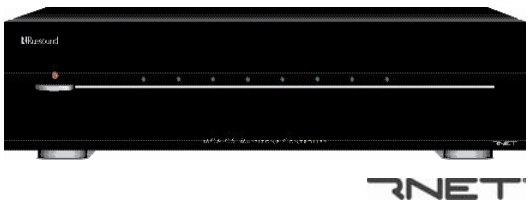

C-Series Multizone Controller Amplifier, MCA-C5

The MCA-C5 is a (8) Zone/(8) Source Controller Amplifier. 8 zones of audio with adjustable bass/treble/loudness/balance with digital amplifiers providing 40 watts of power per channel to zones one through six, 8 source inputs with loop outputs and fixed or variable line outputs per zone, routed IR, built-in IR learning and a pre-programmed IR library, paging and doorbell muting. Internal AM/FM Tuner with RDS (optional source 1). Source linking and zone linking. Front USB and rear RS-232 serial ports, rear Ethernet port, color-coded detachable 14-gauge snap connectors, 12 Volt & home theater triggers. AM and FM Antennas Included. Controllers are rack-mount 2-unit high, and include rack ears.

Rack ears included

17"W x 3.5"H x 17.2"D (43.2 x 9 x 43.6 cm)

1550-530913: MCA-C5
1550-531118: MCA-C5 EU
1550-531101: MCA-C5 UK
Shipping Weight 34.55 lbs. (15.68 kg)

5

C-Series Multiroom Controller Amplifier System

C-Series MCA-C3 System

Includes

(1) MCA-C3 controller
(6) MDK-C5 system keypads
(1) SRC-C5 Remote control
(1) AM Antenna
(1) FM Antenna
(1) Pair rack ears
(6) 845.1 IR Emitters

White & Almond Wall plates and rack ears included

1550-533259: KT1-C3
1550-533266: KT1-C3 EU
1550-533277: KT1-C3 UK
Shipping Weight
38.35 lbs. (17.4 kg)

C-Series Multizone Controller Amplifier, MCA-C3

The MCA-C3 is a (6) Zone/(6) Source Controller Amplifier. 6 zones of audio with adjustable bass/treble/loudness/balance with analog amplifiers providing 20 watts of power per channel to all 6 zones, 6 source inputs and fixed or variable line outputs for zones 1 and 2, routed IR, built-in IR learning and a pre-programmed IR library, paging (optional source 6) and doorbell muting. Internal AM/FM Tuner with RDS (optional source 1). Source linking and zone linking. Front USB and rear RS-232 serial ports, rear Ethernet port, color-coded detachable 14-gauge snap connectors, 12 Volt & home theater triggers. AM and FM Antennas Included. Controllers are rack-mount 2-unit high, and Low standby power consumption of less than 1 watt.

Rack ears included

17"W x 3.5"H x 17.2"D (43.2 x 9 x 43.6 cm)

1550-532986: MCA-C3
1550-533051: MCA-C3 EU
1550-533068: MCA-C3 UK
Shipping Weight 34.55 lbs. (15.68 kg)

C-Series Multiline Display Keypad

Wall-mounted, standard fit, double-gang keypad for the MCA-C5 Multizone Controller Amplifier. 3" diagonal, high-resolution gray scale LCD screen displays real-time system information. Responsive hard buttons provide easy navigation of sources and content. Adjustable brightness, volume, bass, treble, and balance. Access to source selection and control, party mode, all off, and alarm and sleep timer. RJ45 connection. 4.5"W x 4.5"H (11.43 x 11.43 cm

1550-530937: MDK-C5 (white/almond)
Shipping Weight 1 lb. (454 g

C-Series Plasma Friendly Multi-line Display Keypad

Designed for Home Theater applications which use Plasma screens
4.5"W x 4.5"H (11.43 x 11.43 cm

1550-531729: MDK-C5P (white/almond)
Shipping Weight 1 lb. (454 g)

NEW

MDK-C5 Screwless wallplate with Single Gang

7106-532238 :White
7106-532245 :Almond
7106-532313 :Bone
7106-532337 :Brown
7106-532344 :Black
Shipping Weight 4 oz. (114 g)



Color Conversion Kit

Includes (1) Decora Trim and (1) Keypad Bezel.

1550-531361: White
1550-531378: Almond
1550-531385: Bone
1550-531392: Brown
1550-531408: Black
Shipping Weight 4 oz. (114 g)

Keypad Desktop Stand

Desktop Stand is an accessory base that allows the E-Series KLK-E5, KLK-E6 and C-Series MDK-C5 keypads to be used on a desk, table, or counter top. Weighted body and non-skid base. 5.92" W x 5.38" D x 4.68" H
(152 x 138 x 120 mm)
7301-532351: DTS1 White
7301-532368: DTS1 Black
Shipping Weight: 1.93 lbs (0.87 kg)

UNO-TS2 Touchscreen, In-Wall

Real-time display shows what's playing, with volume level and individualized playlist information right on the touchscreen. High-resolution color LCD 3.75" diagonal touchscreen is easy to read and simple to navigate. Flush design fits neatly in a double-gang box.
***After the first UNO-TS2, each additional UNO-TS2 my require an**

SA-ZX3 keypad splitter. Check Controller specifications.

2500-521171: White UNO-TS2
2500-521973: Almond UNO-TS2
2500-521980: Bone UNO-TS2
2500-521997: Black UNO-TS2
2500-522000: Brown UNO-TS2
Shipping Weight 1.2 lbs.

UNO-TS2D Desktop Touchscreen

Desktop version of the UNO-TS2 wall-mounted touchscreen. 5.92"W x 5.38"D x 4.68"H (15.2 x 13.8 x 12.0 cm)

2500-526718: White UNO-TS2D
2500-526725: Black UNO-TS2D
Shipping Weight 4 lbs.(1.8 kg)

RNET Touchpoint

Allows Apple iPad, iPhone and iPod touch to control Russound RNET multizone controller amplifiers. Now with content browsing and SMS3 cover art support. Works with the Russound CAV6.6, CAM6.6, MCA-C5, and ACA-E5 controller amplifiers. A local wireless network and iPhone® or iPod touch are required for wireless control.

2610-531903: TCH1
Shipping Weight 2.1 lbs.

RNET

Touchpoint Station

Accessories

RNET AV kit

Allows addition of a remote source component to a Russound RNET enabled Controller Amplifier. Encoder and Decoder convey stereo audio, video, and control signals up to 300 feet (90 m) over a single CAT-5e cable. Includes: (1) RAVE1, (1) RAVD1 and (1) power supply.

9590-529399: RAVK1
9590-520265: RAVK1 EU
9590-520272: RAVK1 UK
Ship Weight 5.6 oz (158 g)

Keypad Splitter for CAA, TS2 and MDK keypads only

Increases power output for connecting up to 3 system keypads to one keypad output on a Russound RNET® Controller Amplifier. Includes(1) RJ- 45 input jack, (3) RJ-45 keypad jacks, (1) 1201A 120V power supply.

2500-120497: SA-ZX3 includes Power Supply
2500-120176: SA-ZX3 without Power Supply
Shipping Weight 4 oz. (.11 kg)

System Remote Control

Advanced learning remote control for Russound multiroom systems. Controls up to eight audio-video sources and three local.

1210-524196: SRC2
Ship Weight 1 lb (.45 kg)

Programming Cable

Basic programming cable for UNO keypads and touchscreens and SaphIR K2 keypads. Female DB-9 connection (PC end) and flat keypad pin connection (keypad end). 72" L (182.9 cm)

2500-121036
Shipping Weight 1 lbs.(0.45 kg)

Advanced Programming Cable

For UNO-S1, KP4, KP6, KPL keypads, ComPoint components and iBridge Dock. Female DB-9 connection (PC end) and flat device pin connection (device end). 72" L (182.9 cm)

2500-521065
Shipping Weight 1 lbs.(0.45 kg)

CAA Systems

Controller Amplifier: Advanced 6 Source/6 Zone Kit

CAA66 controller with (6) LCD keypads

(6) 845.1 single emitters, punchdown tool, (1) system remote control. (1) CAA66 Controller. (6) Decora® style KPL single-gang keypad has amber backlit LCD panel, source selection, system status indication plus IR pass-through and confirmation.
EU and UK kits include wallplates.
17” W x 12” D x 3.5” H (43.2 x 30.5 x 8.9 cm)

1210-528347: CAA66L
1210-525582: CAA66L EU
1210-525605: CAA66L UK
Shipping Weight 29 lbs. (13.2 kg)

*EU/UK kits contain screwless wallplates.

CALL FOR PRICING

CAA66 controller with (6) KP6 system keypads

(6) 845.1 single emitters, punchdown tool, (1) system remote control. Features: (1) CAA66 Controller. (6) Decora® style KP6 single-gang keypad has amber backlit buttons, 20 source name labels, source selection, plus IR pass-through and confirmation.
17” W x 12” D x 3.5” H (43.2 x 30.5 x 8.9 cm)

1210-528354: CAA66K
1210-525674: CAA66K EU
1210-525681: CAA66K UK
Shipping Weight 29 lbs. (13.2 kg)

*EU/UK kits contain screwless wallplates.

CALL FOR PRICING

CAA System Components

Controller Amplifier: Advanced 6 source/6 zone

CAA66 Features: (6) Six zones (40 Watts per zone) Front panel programing center, built-in IR learning, rear RS-232 serial port, extensive built-in IR library, controller link in and out, color-coded detachable 14-gauge snap connectors, rack-mount 2-unit high. (6) IR Emitters, Controller Only, No keypads. Rack ears included.17” W x 12” D x 3.5” H (43.2 x 30.5 x 8.9 cm)

1210-524882: CAA66 US
1210-525827: CAA66 EU
1210-525834: CAA66 UK
Shipping Weight 23 lbs. (10.4 kg)

LCD Keypad for CAA66/CAS44 Systems

In-wall Decora® style single-gang keypad features backlit LCD panel, amber backlit soft-touch buttons, assignable source names, IR pass-through, 110 punchdown connector, system status feedback, user adjustable zone bass, treble, loudness and balance.
1.85"W x 2.7"D x 1.47"H (4.7 x 6.9 x 3.7 cm) **Wall plates not included.**

1210-528385: White & Almond KPL
Shipping Weight 4.5 oz. (127.6 g)



Color Conversion Kit for KPL

Includes (6)
Decora® inserts.

1210-525100: White
1210-525117: Almond
1210-525124: Bone
1210-525131: Black
1210-525148: Brown
Shipping Weight 2oz (.1kg)

System Keypad for CAA66 System

In-wall Decora® style single-gang keypad features amber backlit soft-touch buttons, 20 source name labels, source selection, plus IR pass-through and confirmation. 110 punchdown connector, installer adjustable zone bass, treble, loudness and balance.
1.85"W x 2.7"D x 1.47"H (4.7 x 6.9 x 3.7 cm) **Wall plates not included.**

1210-528392: White & Almond KP6
Shipping Weight 4.0 oz. (113 g)



Color Conversion Kit for KP6

Includes (6)
Decora® inserts.

1210-525209: White
1210-525216: Almond
1210-525223: Bone
1210-525230: Black
1210-525247: Brown
Shipping Weight 2oz (.1kg)

Source Control Keypad
Optional Keypad for KP6 or KPL Keypad:

NOT A STAND ALONE KEYPAD
In-wall Decora® style single-gang keypad accessory adds source control and numeric control capability to KP6 and KPL keypads. Amber backlit soft-touch buttons.
(1.85"W x 2.7"D x 1"H (4.7 x 6.9 x 2.5 cm) **Wall plates not included.** *Not compatible with CAS44

1210-528415: KPSC
Shipping Weight 3 oz. (85 g)



Color Conversion Kit for KPSC

Includes (6)
Decora® inserts.

1210-525452: White
1210-525469: Almond
1210-525476: Bone
1210-525483: Black
1210-525490: Brown
Shipping Weight 2oz (.1kg)

CAA System Remote Control

The SRC1 Remote Control is designed for use with Russound controllers and keypads in CAA66, CAM6.6, CAV6.6 and RNET® systems. The SRC1 is a system remote only and does not support learning IR codes.

1210-524127: SRC1
Shipping Weight 4 oz. (113 g)

Complete CAS44 System with (4) LCD Keypads

CAS44 controller with 4 KPL LCD keypads, (2) 1584.1 dual emitters, rack ears, punchdown tool, (1) learning/preprogrammed system remote control, (1) IR link cable. Features: (4) zones (40W per zone), (4) audio source inputs, (2) common IR outputs, mute 12V trigger in, 12V trigger out, rear RS-232 serial port, color-coded detachable 14 gauge snap connectors and rack-mount 2U high (rack ears included). Decora® style KPL single-gang keypad has amber backlit LCD, source selection, system status indication plus IR pass-through and confirmation.
17” W x 12” D x 3.5” H (43.2 x 30.5 x 8.9 cm)

White & Almond wall plates included

1210-528361: CAS44L
1210-525711: CAS44L EU
1210-525728: CAS44L UK
Shipping Weight 27 lbs. (12.2 kg)

*EU/UK kits contain screwless wallplates.

CALL FOR PRICING

Complete CAS44 System with (4) System Keypads

CAS44 controller with (4) KP4 system keypads, (2) 1584.1 dual emitters, rack ears, punchdown tool, (1) CAS-RC learning/ preprogrammed system remote control, (1) IR link cable. Features: (4) zones (40W per zone), (4) audio source inputs, (2) common IR outputs, mute 12V trigger in, 12V trigger out, rear RS-232 serial port, color-coded detachable 14 gauge snap connectors and rack-mount 2U high (rack ears included). Decora® style KP4 single-gang keypad has amber backlit buttons, 20 source name labels, source selection, plus IR pass-through and confirmation. 17” W x 12” D x 3.5” H (43.2 x 30.5 x 8.9 cm)

White & Almond wall plates included

1210-528378: CAS44K US
1210-525780: CAS44K EU
1210-525797: CAS44K UK
Shipping Weight 27 lbs. (12.2 kg)

*EU/UK kits contain screwless wallplates.

CALL FOR PRICING

Controller Amplifier: Simple 4 source/4 zone

CAS44: (4) four zones (40 Watts per zone) and rear RS-232 serial ports, color-coded detachable 14-gauge snap connectors and rack-mount 2-unit high. (2) 1584.1 Dual head IR emitter, Controller Only, No keypads. Rack ears included.
17" W x 12" D x 3.5" H (43.2 x 30.5 x 8.9 cm)

1210-524899: CAS44 US
1500-525841: CAS44 EU
1500-525858: CAS44 UK
Shipping Weight 23 lbs. (10.4 kg)

Advanced Programming Cable

Advanced programming cable for UNO-S1, KP4, KP6, KPL keypads, ComPoint components (ISK1, ISK2, ISK3, ISH1), and iBridge Dock. Female DB-9 connection (PC end) and flat device pin connection (device end). 72" L (182.9 cm)

2500-521065
Shipping Weight 1 lbs. (0.45 kg)

LCD Keypad for CAA66 and CAS44 Systems

In-wall Decora® style single-gang keypad features backlit LCD panel, amber backlit soft-touch buttons, assignable source names, IR pass-through, 110 punchdown connector, system status feedback, user adjustable zone bass, treble, loudness and balance.
1.85"W x 2.7"D x 1.47"H (4.7 x 6.9 x 3.7 cm)
Wall plates not included.

1210-528385: White & Almond KPL
Shipping Weight 4.5 oz. (127.6 g)



Color Conversion Kit for KPL

Includes (6) Decora® inserts.

1210-525100: White
1210-525117: Almond
1210-525124: Bone
1210-525131: Black
1210-525148: Brown
Shipping Weight 2oz (.1kg)

System Keypad for CAS44 Systems

In-wall Decora® style single-gang keypad features amber backlit soft-touch buttons, 20 source name labels, source selection, plus IR pass-through and confirmation. 110 punchdown connector, installer adjustable zone bass, treble, loudness and balance.
1.85"W x 2.7"D x 1.47"H (4.7 x 6.9 x 3.7 cm)
Wall plates not included.

1210-528408: White & Almond KP4
Shipping Weight 4.0 oz. (113 g)



Color conversion kit for KP4

Includes (6) Decora® inserts.

1210-525254: White
1210-525261: Almond
1210-525278: Bone
1210-525285: Black
1210-525292: Brown
Shipping Weight 2oz (.1kg)

CAS44 System Remote Control

The CAS-RC Remote Control is designed for use with the Russound CAS44 controller amplifier and system keypads (KP6, KP4, and KPL). It is designed to operate source devices and the audio system keypad, and is preprogrammed to control Russound components ST2 Tuner and SMS3 Media Server The CAS-RC controls up to four devices.

1210-524134: CAS-RC
Shipping Weight 4.0 oz. (113 g)

CA4 Systems

CA4 Multiroom Controller Amplifier Kit

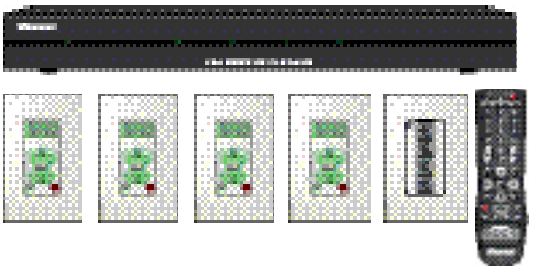

CA4 Multiroom Kit

Kit includes

(1) CA4 controller
(4) CA4-KP system keypads
(1) CA4-WP Wall Port
(4) 845.1 single emitters
(1) CA4-RC System remote
(1) Pair rack ears

1200-530418: CA4-KT1
1200-530425: CA4-KT1-EU*
1200-530432: CA4-KT1-UK*
Shipping Weight 14.60 lbs
***EU/UK kits contain screwless wallplates.**

CALL FOR PRICING

CA4 Multiroom Controller Amplifier System Components

CA4 Multizone Controller

4 source/4 zone Rack mount, Source grouping, party mode, fixed and variable line outputs, 1-unit high, (4) four zones (30 Watts per zone), rear RS-232 port, RJ-45 expander jack, (4) 845.1 single emitters. Controller only, no keypads.
Rack ears included.

1200-529689: CA4
1200-530449: CA4-EU
1200-530456: CA4-UK
Shipping Weight 11 lbs

CA4 Wall Port

Single-gang, in-wall port for connection of a CA4 Multizone Controller to four system zone keypads and speakers. (4) RJ-45 inputs, (4) RJ-45 outputs, (4) speaker terminal pairs.
Wall plates not included.

1200-529719: CA4-WP (white)
Shipping Weight 0.1 oz.

CA4 System Keypad

Single-gang, in-wall Decora ® style keypad for control of a CA4 Multizone audio system. (1) RJ-45 connection.
Wall plates not included.

1200-529696: CA4-KP (white)
Shipping Weight 0.1 oz.

Color Conversion Kit for CA4-KP

Includes (4) Decora® inserts.
Also includes
(1) Wall Port insert

1200-531057: White
1200-531064: Almond
1200-531095: Bone
1200-531071: Black
1200-531088: Brown
Shipping Weight 2oz (.1kg)

CA4 System Remote Control

Advanced IR learning and pre-programmed remote control for CA4 Multizone Controller. It is designed to operate source devices and the CA4 Multizone audio system keypads. Controls up to four devices.

1200-529702: CA4-RC
Shipping Weight 0.4 oz

A-BUS Multisource Kits

Six-Source/Eight-Zone Controller Kit

(1) A-C68 Multizone Controller
(6) A-K5L Amplified LCD Keypads
(1) A-SRC1 System Remote
(6) 845.1 IR Emitter

2000-527661: A-C560
2000-529733: A-C560-EU*
2000-529740: A-C560-UK
Shipping Weight 18.5 lbs*

*EU/UK kits contain screwless wallplates.

CALL FOR PRICING

Four-Source/Four-Zone Kit with Local Source Input

(1) A-H484 Multisource Multizone Hub
(4) A-K3 Amplified Keypads
(1) A-LRC2 Learning Remote
(1) A-LC3 Local Source Input
(4) 845.1 IR Emitter
(1) A-PS Power Supply

2000-527678: A-M341
2000-529757: A-M341-EU*
2000-529764: A-M341-UK*

Shipping Weight 5 lbs

*EU/UK kits contain screwless wallplate

CALL FOR PRICING

Four-Source/Four-Zone Kit (International only)

(1) A-H484 Multisource Multizone Hub
(4) A-KP- EU Amplified Keypads
(1) A-LRC2 Learning Remote
(4) 845.1 IR Emitter
(1) A-PS Power Supply

2000-529771: A-ME40-EU
2000-529788: A-ME40-UK
Shipping Weight 5 lbs

A-BUS Decora Style, Single-Source Kits

Decora Style (In-wall) Single-Source/ Two-Zone Kit

(1) A-H4D In-wall Hub
(2) A-VC2 Ampl. Volume Controls
(1) A-PS Power Supply
(1) Punchdown Tool

2000-527753: A-D120
2000-529924: A-D120-EU
2000-529931: A-D120-UK
Shipping Weight 3.2 lbs

*EU/UK kits contain screwless wallplates.

CALL FOR PRICING

Decora Style (In-wall) Single-Source/ Two-zone Kit with Remote Control

(1) A-H4D In-wall Hub
(2) A-K3 Amplified Keypads
(1) A-LRC2 Learning Remote
(1) 1584.1 Dual IR Emitter
(1) A-PS Power Supply
(1) Punchdown Tool

2000-527760: A-D320
2000-529948: A-D320-EU
2000-529955: A-D320-UK
Shipping Weight 4.0 lbs

*EU/UK kits contain screwless wallplates.

CALL FOR PRICING

Decora style (in-wall) Single-Source/Four-Zone Kit with Remote Control

(1) A-H4D In-wall Hub
(4) A-K3 Amplified Keypads
(1) A-LRC2 Learning Remote
(1) 1584.1 Dual IR Emitter
(1) A-PS Power Supply
(1) Punchdown Tool

2000-527784: A-D340
2000-529986: A-D340-EU
2000-529993: A-D340-UK
Shipping Weight 5 lbs

*EU/UK kits contain screwless wallplates.

CALL FOR PRICING

Decora style (in-wall) Single-Source/ Four-Zone Kit with Remote Control and Local Source Input

(1) A-H4D In-wall Hub
(4) A-K3 Amplified Keypads
(1) A-LRC2 Learning Remote
(1) A-LC3 Local Source Input
(1) 1584.1 Dual IR Emitter
(1) A-PS Power Supply
(1) Punchdown Tool

2000-527791: A-D341
2000-530005: A-D341-EU
2000-530012: A-D341-UK
Shipping Weight 5 lbs

*EU/UK kits contain screwless wallplates.

CALL FOR PRICING

A-BUS® Systems

A-BUS Decora Style Expansion Kits

Decora Style (in-wall) Two-Zone Expansion Kit (for A-H4D)

(1) A-H4Dx Expansion Hub
(2) A-K3 Amplified Keypads
(1) A-PS Power Supply

2000-527838: A-X320
2000-530081: A-X320-EU
2000-530098: A-X320-UK
Shipping Weight 3 lbs

*EU/UK kits contain screwless wallplates.

CALL FOR PRICING

Decora Style (in-wall) Four-Zone Expansion Kit (for A-H4D)

(1) A-H4Dx Expansion Hub
(4) A-K3 Amplified Keypads
(1) A-PS Power Supply
(1) Punchdown Tool

2000-527845: A-X340
2000-530104: A-X340-EU
2000-530111: A-X340-UK
Shipping Weight 3 lbs

*EU/UK kits contain screwless wallplates.

CALL FOR PRICING

A-BUS Structured Wiring, Single-Source Kits (International ONLY)

Single-Source/Four-Zone Kit with Remote Control (International only)

(1) A-H4 Surface Mount Hub
(4) A-KP-EU Keypads
(1) A-LRC2 Learning Remote
(1) 1584.1 Dual IR Emitter
(1) A-PS Power Supply

2000-530524: A-SE40-EU*
2000-530517: A-SE40-UK*

CALL FOR PRICING

Single-Source/Four-Zone Kit with Remote Control and Local Source Input (International only)

(1) A-H4 Surface Mount Hub
(4) A-KP-EU Amplified Keypads
(1) A-LRC2 Learning Remote
(1) A-LC3 Local Source Input
(1) 1584.1 Dual IR Emitter
(1) A-PS Power Supply

2000-529900: A-SE41-EU*
2000-529917: A-SE41-UK*

CALL FOR PRICING

A-BUS Structured Wiring, Single-Source Kits

Single-Source/Two-Zone Kit with Remote Control

(1) A-H2 Surface Mount Hub
(2) A-K3 Amplified Keypads
(1) A-LRC2 Learning Remote
(1) 1584.1 Dual IR Emitter
(1) A-PS Power Supply

2000-527708: A-S320
2000-529825: A-S320-EU
2000-529832: A-S320-UK
Shipping Weight 3.5 lbs

*EU/UK kits contain screwless wallplates.

CALL FOR PRICING

Single-Source/Four-Zone Kit with Remote Control

(1) A-H4 Surface Mount Hub
(4) A-K3 Amplified Keypads
(1) A-LRC2 Learning Remote
(1) 1584.1 Dual IR Emitter
(1) A-PS Power Supply

2000-527722: A-S340
2000-529863: A-S340-EU
2000-529870: A-S340-UK
Shipping Weight 4.7 lbs

*EU/UK kits contain screwless wallplates.

CALL FOR PRICING

Single-Source/Four-Zone Kit with Remote Control and Local Source Input

(1) A-H4 Surface Mount Hub
(4) A-K3 Amplified Keypads
(1) A-LRC2 Learning Remote
(1) A-LC3 Local Source Input
(1) 1584.1 Dual IR Emitter
(1) A-PS Power Supply

2000-527739: A-S341
2000-529887: A-S341-EU
2000-529894: A-S341-UK
Shipping Weight 5 lbs

*EU/UK kits contain screwless wallplates.

CALL FOR PRICING

A-BUS Multi-source Controller and Hub

6 Source/8 Zone multizone controller

Rack mount, 1-unit high, rear RS-232 port, (2) RJ-45 expander jacks, (6) 845.1 single emitters. IR library, sleep timer, learning and paging. Controller only, no keypads. Rack ears included.

2000-527432: A-C68

4 Source/4 Zone Surface Mount Hub

4 Pairs of gold plated audio RCA jacks, (4) Routed IR emitter jacks, (1) Common IR Jack, (8) RJ-45 keypad connectors, (1) 12 Volt trigger output, (2) Power supply jacks. 6.5" W x 5" H x 1.5" D (165 x 127 x 38 mm)

2000-115882: A-H484

Shipping Weight 2.25 lbs (.5kg)

A-BUS Single Source

1 Source/2 Zone Surface Mount Hub

Gold plated audio input RCA jacks, (4) IR emitter jacks, (2) RJ-45 keypad connectors, (1) Expansion input, IR confirmation LED.6.5" W x 2" H x 1.5 D (165 x 51 x 38 mm

2000-115837: A-H2

Shipping Weight 7 oz. (198 g

1 Source/4 Zone Surface Mount Hub

Gold plated audio input/output RCA jacks, (4) IR emitter jacks, (4) RJ-45 keypad connectors, RJ-45 IR link input and output, IR confirmation LED. Requires A-PS power supply. 6.5" W x 3" H x 1.225" D (165 x 76 x 32 mm)

2000-115851: A-H4

A-BUS Remote Source Components

1 Source A-BUS Audio Interface

Uses standard RJ45 jack. Supports A-BUS hubs like the A-H4P, A-H4. IR emitter outputs for source control. 6.5" W x 3" H x 1.225" D (165 x 76 x 32 mm)

2000-121845: A-H1

Shipping Weight 7 oz. (198 g)

4 Zone Hub Panel

Single input structured wiring A-BUS Audio Distribution Hub. Requires A-BUS ready source or A-H1 Audio Interface Hub. Uses 110 punchdown connectors and CAT-5 for easy hookup. Requires A-PS power supply. 6.5" W x 3" H x 1.25" D (165 x 76 x 32 mm)

2000-121852: A-H4P

Shipping Weight 8 oz. (226 g)

A-BUS Decora Style Components

In-wall, 4 Zone Single Source Hub

Fits in a standard double gang work box. Gold plated audio input and output RCA jacks, (4) IR emitter jacks, 110 punchdown terminals, 24 VDC power and 12 VDC status jacks. **Wall plates not included** 3.625" W x 4.125" H x 1.125" D (9.2 x 10.5 x 4.8 cm)

2000-528224: White/Almond A-H4D
2000-117831: Bone A-H4D
2000-116056: Black A-H4D
2000-117855: Brown A-H4D

Expansion Hub

Plugs into existing A-H4D hub for 4 additional zones. Requires A-PS and A-H4D. Installation requires a three-gang work box.
*Wall plates not included with keypads.
6.5" W x 3" H x 1.225" D (165 x 76 x 32 mm

2000-528231 White/Almond A-H4DX
2000-117893 Bone A-H4DX
2000-117909 Black A-H4DX
2000-117916 Brown A-H4DX

Shipping Weight1 lbs (.5kg)

A-BUS Amplified LCD Keypad

Digital amp, LCD panel and IR receiver, tone control, pre-amp output, up to 12-source selection,RJ-45 connector to controller, for use with A-C68. **Wall plates not included.**

2000-527654: Wht/Alm. A-K5L

A-BUS Source Control Keypad

11-button keypad connects to A-K5L to add numeric and transport control of sources, for use with A-K5L and A-C68.
Wall plates not included.

2000-527463: Wht/Alm. A-KSC

A-BUS Amplified Keypad

Analog amp, IR receiver, pre-amp outputs, left and right gain controls with RJ-45 connector.
Wall plates not included.

2000-527449: Wht/Alm. A-K3

A-BUS Local Source Input

IR emitter for local source control, auto sensing to override audio, wires between hub or controller and keypad.
Wall plates not included.

2000-527456: Wht/Alm. A-LC3

A-BUS Amplified LCD Keypad Conversion kits

2000-528682: A-K5L, 4 White
2000-528699: A-K5L, 4 Almond
2000-528705: A-K5L, 4 Bone
2000-528729: A-K5L, 4 Brown
2000-528712: A-K5L, 4 Black

A-BUS Source Control Keypad Conversion kits

2000-528781: A-KSC, 4 White
2000-528798: A-KSC, 4 Almond
2000-528804: A-KSC, 4 Bone
2000-528828: A-KSC, 4 Brown
2000-528811: A-KSC, 4 Black

A-BUS Amplified Keypad Conversion kits

2000-528637: A-K3, 4 White
2000-528644: A-K3, 4 Almond
2000-528651: A-K3, 4 Bone
2000-528675: A-K3,4 Brown
2000-528668: A-K3, 4 Black

A-BUS Local Source Input Conversion kits

2000-528736: A-LC3, 4 White
2000-528743: A-LC3, 4 Almond
2000-528750 A-LC3, 4 Bone
2000-528767 A-LC3, 4 Brown
2000-528774 A-LC3, 4 Black

A-BUS Amplified Volume Control.

Features system status indicator, pre-amp outputs, L&R channel gain controls with 110 punchdown termination. **Do not use with multi-source A-BUS Controller or Hub.**
1.3125" W x 2.5" H x 1.5" D
(33.5 x 63.5 x 38.5 mm)

2000-528217: Wht/Alm. A-VC2
2000-521201: Bone A-VC2
2000-521188: Brown A-VC2
2000-521218: Black A-VC2
Shipping Weight 5oz (.1kg)

A-BUS Amplified Keypad, Euro Style

45x45mm Euro style with IR, pre-amp outputs, L&R channel gain controls, backlit, volume and status indicators, source selection when used with the A-H484 Multi-Source Hub, fits in a 48mm wall box. **Wall plates not included.**

2000-118838: White A-KP EU
2000-118821: Black A-KP EU

Color conversion kits for in-wall hubs

(1) Decora Audio Plate, (1) Decora® IR Plate, (1) A-H4Dx Decora Plate.

2**000-521928: White A-H4D CONV**
2000-118739: Almond A-H4D CONV
2000-118708: Bone A-H4D CONV
2000-118722: Black A-H4D CONV
2000-118715: Brown A-H4D CONV
Shipping Weight 2oz (.1kg)

A-BUS System Remote Control (for A-C68)

A-BUS system remote control for A-C68, features source selection and control for up to six system sources and one local source.

2000-526749: A-SRC1

A-BUS Learning Remote Control

Learning/pre-programmed remote control. Features source selection and control for up to seven devices and A-BUS system keypads. Pre-programmed with most major brands of audio and video equipment, can learn IR commands, works well as a standalone home theater remote.

2000-526732: A-LRC2

A-BUS Line Level Output Module

Provides a fixed-level stereo line output from an A-BUS hub keypad port or other A-BUS-ready multiroom controller to an external amplifier or receiver. RJ45 CAT-5 cable connection, RCA jacks for left-right audio, IR receiver input terminals. 3.33" W x 2.38" H x 1.59" D (8.4 x 6.0 x 4.0 cm)

2000-526473: A-OM
Ship Weight 5.6 oz (158 g)

A-BUS® Power Supply.

24 Volt DC. Features: Autosensing 110/220 voltage, detachable power cord, compact size.
6.5" W x 2.75" H x 3.75" D (165.5 x 70 x 95.5 mm)

2000-113833: A-PS US
2000-114557: A-PS-EU
2000-114847: A-PS-UK
Shipping Weight 1.25 lbs (.57 kg)

Smart Media Servers

Smart Media Server 320

Three independent music streams, 320GB hard drive for plenty of storage, CD-ROM drive for loading music. Supports TV or monitor display, web based user interface, and IR remote control. Delivers metadata to RNET keypads. Includes: (1) SMS3-320 Media Server, (1) SMS3-RC Remote Control, (3) RCA cables, (1) Composite Video cable,
Pair rack-mount ears, power supply. Rack-mountable 1u high.
17" W x 12.9" D x 1.75" H (43 x 20.3 x 4.4 cm)

2420-532818: SMS3-320 US
2420-532825: SMS3-320-EU/UK
Shipping Weight 22.7 lbs (10.3 kg)

Smart Dual Tuners

ST2 Smart Tuner

Dual AM/FM tuner. Can be used in an IR-controlled, A-BUS or RNET-enabled system. Stores up to 72 station presets with custom naming. Includes AM and FM antennas (2 each), RCA cables, ST2-RC Remote Control, rack-mount ears, 12VDC power supply. Rack-mountable at 1 unit high.
17" W x 12.9" D x 1.75" H (43 x 20.3 x 4.4 cm)

2410-121906: ST2 US
2410-520129: ST2-EU
2410-520143: ST2-UK
Shipping Weight 10.5 lbs (4.7 kg)

ST2-KP

The ST2-KP Smart Tuner keypad allows you to view Station feedback and lets you select your favorite preset station in any non-RNET system where a tuner display and control is desired. *Wall plates not included with keypads.
1.3125" W x 2.5" H x 1.375" D (33.5 x 63.5 x 35 mm)

2410-520846: White
2410-520853: Almond
2410-520860: Bone
2410-520884: Black
2410-520877: Brown
Shipping Weight 3oz (.1 kg)

Smart Dual Tuners with Satellite Radio

Satellite radio service is available in the UNITED STATES & CANADA ONLY

- Over 150 channels of Music
- News, talk, sports and traffic
- Digital quality audio

Smart Dual Tuner with XM

1 AM/FM tuner and 1 XM tuner. Seek and scan functions. Stores up to 72 station presets with custom naming. Includes AM and FM antennas, XM antenna, RCA cables, ST2-RC Remote Control, rack-mount ears, 12VDC power supply. RG6 to SMB adapter cable. Rack-mountable at 1 unit high.
17" W x 8" D x 1.75" H (43 x 20.3 x 4.4 cm)

2410-521072: ST2-XM
Shipping Weight 9.9 lbs (4.5 kg)

- Over 150 channels of Music
- News, talk, sports and traffic
- Digital quality audio

Smart Dual XM Tuner

2 XM tuners. Seek and scan functions. Stores up to 72 station presets with custom naming. Includes (2) XM antennas, RCA cables, ST2-RC Remote Control, rack-mount ears, 12VDC power supply. Rack-mountable at 1 unit high. RG6 to SMB adapter cable. 17" W x 8" D x 1.75" H (43 x 20.3 x 4.4 cm)

2410-522017: ST2-XM2
Shipping Weight 10.25 lbs (4.65kg)

iBridge Systems

iBridge Dock Kit

Allows you to use an iPod as a remote source for a Russound RNET or other multiroom audio-video system. Used with a Russound RNET A/V Decoder, it provides either RNET or infrared (IR) control of the iPod, depending on the type of system.

2430-526541: BGK1
2430-526589: BGK1 EU
2430-526596: BGK1 UK
Shipping Weight 3.7 lbs (1.7 kg)

iBridge Bay Kit

The complete solution for integrating iTunes® media from a Intel® Core Duo Mac® desktop or MacBook® with an RNET® multiroom system. Kit includes: (1) BGB2 iBridge Bay, (1) RAVD1 RNET A/V Decoder, (1) 12 VDC 1A power supply, (2) RJ-45 patch cables, (1) USB cable, (1) composite video cable, (1) stereo mini patch cable, (1) stereo RCA patch cable

2430-527005: BGK2
2430-527371: BGK2 EU
2430-527388: BGK2 UK
Shipping Weight 3.5 lbs (1.6 kg)

Video Distribution

Video

Composite Video Connector

Premium gold plated RCA. Converts composite video signal from RCA to CAT-5 cable. Sold in pairs.
Works up to 2200 feet

7103-121876: MOD-VB
Shipping Weight 2 oz (.05g)

/pr

Active Component Video Balun Kit

Send component video over CAT-5 up to 500 feet point-to-point. Includes the HDTX, HDRX and 12VDC 200mA power supply.

Not for sale in countries with CE requirements

9590-526220: VBHD Kit
Shipping Weight 1.25 lbs. (.68 kg)

Active Composite Audio-Video Balun Kit

Send composite video and audio over CAT-5 up to 1000 feet point to point. Includes the CTX, CRX and 12VDC 200mA power supply.

Not for sale in countries with CE requirements

9590-526237: VBC Kit
Shipping Weight 1.25 lbs. (.68 kg)

HD Video Matrix for RNET: 4 Zone Systems

Free Video Matrix Configuration Software Now Available

Russound's new VM1 Configuration Tool allows for the custom assignment of Video Matrix inputs and outputs to specific Russound controller amplifier sources and zones.

For a copy of the VM1 Configuration Tool software, instructions and the latest VM1 Video Matrix firmware, please visit Russound's Document Center online at www.russound.com/doccenter/doccenter.php

Video Matrix 4 zone kit

Four source, four zone high-definition Video Matrix system. RNET and RS-232 control capable. Includes: (1) 4x4 matrix (VM1), (1) power supply (A-PS) and 4 video receivers (VMR1)

EU & UK include Wall plates.

2210-527043: VM1-4
2210-527494: VM1-4 EU
2210-527500: VM1-4 UK
Shipping Weight 25 lbs. (11.3 kg)

Video Matrix 4 zone kit with 2 zone up-conversion

Four source, four zone high-definition Video Matrix system. S-video, NTSC or PAL composite video Up-conversion on two sources. RNET and RS-232 control capable. Includes: (1) 4x4 matrix (VM1), (1) power supply (A-PS) and (4) video receivers (VMR1)

EU & UK include Wall plates.

2210-527050: VM1-4UC
2210-527517: VM1-4UC EU
2210-527524: VM1-4UC UK
Shipping Weight 25 lbs. (11.3 kg)

HD Video Matrix for RNET: 8 Zone Systems

Video Matrix 8 zone kit

Eight source, eight zone high-definition Video Matrix system. RNET and RS-232 control capable. Includes: (1) 8x8 matrix (VM1), (1) power supply (A-PS) and (8) video receivers (VMR1)

EU & UK include Wall plates.

2210-527067: VM1-8
2210-527531: VM1-8 EU
2210-527548: VM1-8 UK
Shipping Weight 25 lbs. (11.3 kg)

Video Matrix 8 zone kit with 2 zone up-conversion

Eight source, eight zone high-definition Video Matrix system. S-video, NTSC or PAL composite video Up-conversion on two sources. RNET and RS-232 control capable. Includes: (1) 8x8 matrix (VM1), (1) power supply (APS) and (8) video receivers (VMR1)

EU & UK include Wall plates.

2210-527074: VM1-8UC
2210-527555: VM1-8UC EU
2210-527562: VM1-8UC UK
Shipping Weight 25 lbs. (11.3 kg)

Video Matrix 8 zone kit with 4 zone up-conversion

Eight source, eight zone high-definition Video Matrix system. S-video, NTSC or PAL composite video Up-conversion on four sources. RNET and RS-232 control capable. Includes: (1) 8x8 matrix (VM1), (1) power supply (APS) and (8) video receivers (VMR1)
EU & UK include Wall plates.

2210-527081: VM1-8UC2
2210-527579: VM1-8UC2 EU
2210-527586: VM1-8UC2 UK
Shipping Weight 25 lbs. (11.3 kg)

Acclaim 7 Series 7” In-Ceiling Single Point Stereo, 100 watts

In-ceiling Single Point Stereo, Twist & Tilt speaker
7.0” injection molded polypropylene and ribbed Kevlar woofer with a 1.0” pivoting silk tweeter, power handling from 10 – 100 watts total at 6 ohms per channel

3155-529283: 7C74S
Shipping Weight 5.69 lbs (2.5 kg)

Acclaim 7 Series 8” In-Ceiling Single Point Stereo, 125 watts

In-ceiling Single Point Stereo, Twist & Tilt speaker
8.0” aluminum woofer with a 1.0” pivoting Teteron tweeter,
power handling from 10 – 125 watts total at 6 ohms per channel

3155-529290: 7C85S
Shipping Weight 4.94 lbs (2.24 kg)

Acclaim 7 Series 5.25” In-Ceiling, 75 watts

2-way in-ceiling Twist & Tilt speaker pair
5.25” vacuum formed polypropylene woofer with a 0.5” pivoting polyamide tweeter, power handling from 10 – 75 watts at 6 ohms

3155-529061: 7C51
Shipping Weight 7.94 lbs (3.6 kg)

Acclaim 7 Series 7” In-Ceiling, 85 watt

2-way in-ceiling Twist & Tilt speaker pair
7.0” vacuum formed polypropylene woofer with a 1.0” pivoting silk tweeter,
power handling from 10 – 85 watts at 6 ohms

3155-529092: 7C72
Shipping Weight 10.25 lbs (4.14 kg)

Acclaim 7 Series 7” In-Ceiling, 100 watt

2-way in-ceiling Twist & Tilt speaker pair
7.0” injection molded polypropylene and ribbed Kevlar woofer with a 1.0” pivoting silk tweeter, power handling from 10 – 100 watts at 6 ohms

3155-529108: 7C74
Shipping Weight 10.30 lbs (4.67 kg)

Acclaim 7 Series 7” In-Ceiling, 125 watt

2-way in-ceiling Twist & Tilt speaker pair
7.0” aluminum woofer with a 1.0” pivoting Teteron tweeter,
power handling from 10 – 125 watts at 6 ohms

3155- 529115: 7C75
Shipping Weight 11.35 lbs (5.19 kg)

Acclaim 7 Series 7” In-Ceiling, 150 watt

2-way in-ceiling Twist & Tilt speaker pair
7.0” woven Kevlar woofer with a 1.0” pivoting titanium tweeter,
power handling from 10 – 150 watts at 4/5/6 ohms

3155-529122: 7C76
Shipping Weight 14.66 lbs (6.65 kg)

Acclaim 7 Series 8” In-Ceiling, 125 watts

2-way in-ceiling Twist & Tilt speaker pair
8.0” aluminum woofer with a 1.0” pivoting Teteron tweeter,
power handling from 10 – 125 watts at 6 ohms

3155-529153: 7C85
Shipping Weight 14.55 lbs (6.6 kg)

Acclaim 7 Series 8” In-Ceiling, 150 watts

2-way in-ceiling Twist & Tilt speaker pair
8.0” woven Kevlar woofer with a 1.0” pivoting titanium tweeter,
power handling from 10 – 150 watts at 4/5/6 ohms

3155-529160: 7C86
Shipping Weight 14.99 lbs (6.8 kg)

Acclaim 7 Series 7” In-Wall, 125 watts

2-way in-wall Iso-Mount speaker pair
7.0” aluminum woofer with a 1.0” pivoting Teteron tweeter,
power handling from 10 – 125 watts at 6 ohms

3155-529214: 7W75
Shipping Weight 14.77 lbs (6.7 kg)

Acclaim 7 Series 7” In-Wall, 150 watts

2-way in-wall Iso-Mount speaker pair
7.0” woven Kevlar woofer with a 1.0” pivoting titanium tweeter,
power handling from 10 – 150 watts at 4/5/6 ohms

3155-529221: 7W76
Shipping Weight 16.76 lbs (7.6 kg)

Acclaim 7 Series 8” In-Wall, 150 watts

3-way in-wall Iso-Mount speaker pair
8.0” woven Kevlar woofer with a 1.0” pivoting titanium tweeter, and a 3” polypropylene cone mid,
power handling from 10 – 150 watts at 4/5/6 ohms

3155-529245: 7W86
Shipping Weight 19.4 lbs (8.8 kg)

Acclaim 7 Series 5.25” In-Wall LCR, 100 watts

2-way LCR Iso-Mount speaker
5.25” aluminum woofer with a 1.0” pivoting Teteron tweeter,
power handling from 10 – 100 watts at 4/5/6 ohms

3155-529306: 7W55LCR
Shipping Weight 19.22 lbs (4.2 kg)

Acclaim 7 Series 5.25” In-Wall Fixed Tilt, Single-Point-Stereo, 75 watts

2-way in-wall , single-point-stereo, fixed tilt w/Iso-Mount™ speaker 5.25” vacuum formed polypropylene woofer with Dual 1.0” tweeters, Magnetic grille,10-75 watts at 6 ohm/ 6 ohm

3155-532214: 7W51SFT
Shipping Weight 9.9 lbs (4.5 kg)

Acclaim 7 Series 5.25” In-Wall, Fixed Tilt, 85 watts

2-way in-wall Fixed Tilt w/Iso-Mount™ speaker 5.25” vacuum formed polypropylene woofer with a 1.0” tweeter, Magnetic grilles,10-85 watts at 6 ohms

3155-532221: 7W52FT
Shipping Weight 9.9 lbs (4.5 kg)

Acclaim 5 Series 5.25” In-Ceiling Single Point Stereo, 75 watts

In-ceiling Single Point Stereo speaker
5.25” vacuum formed polypropylene woofer with two 0.5” pivoting PEI tweeters,
power handling from 10 – 75 watts total at 6 ohms per channel.

3165-530586 :5C51S
Shipping Weight 3.15 lbs (1.42 kg)

Acclaim 5 Series 6.5” In-Ceiling Single Point Stereo, 75 watts

In-ceiling Single Point Stereo speaker
6.5” vacuum formed polypropylene woofer with two 0.5” pivoting PEI tweeters,
power handling from 10 – 75 watts total at 6 ohms per channel

3165-530609: 5C61S
Shipping Weight 3.95 lbs (1.79 kg)

Acclaim 5 Series 5.25” In-Ceiling, 75 watts

2-way in-ceiling speaker pair
5.25” vacuum formed polypropylene woofer with a 0.5” pivoting PEI tweeter,
power handling from 10 – 75 watts at 8 ohms

3165-530579: 5C51
Shipping Weight 5.8 lbs (2.63 kg)

Acclaim 5 Series 6.5” In-Ceiling, 75 watts

2-way in-ceiling speaker pair
6.5” vacuum formed polypropylene woofer with a 0.5” pivoting PEI tweeter,
power handling from 10 – 75 watts at 8 ohms

3165-530593: 5C61
Shipping Weight 7.39 lbs (3.35 kg)

Acclaim 5 Series 6.5” In-Ceiling, 85 watts

2-way in-ceiling speaker pair
6.5” vacuum formed polypropylene woofer with a 1.0” pivoting silk tweeter,
power handling from 10 – 85 watts at 8 ohms

3165-530616: 5C62
Shipping Weight 7.69 lbs (3.48 kg)

Acclaim 5 Series 8” In-Ceiling, 125 watts

2-way in-ceiling speaker pair
8.0” vacuum formed polypropylene woofer with a 1.0” pivoting silk tweeter,
power handling from 10 – 125 watts at 8 ohms

3165-530630: 5C82
Shipping Weight 10.67 lbs (4.89 kg)

Acclaim 5 Series 8” In-Ceiling, 150 watts

2-way in-ceiling speaker pair
8.0” injection molded polypropylene and Kevlar woofer with a 1.0” pivoting silk tweeter,
power handling from 10 – 150 watts at 8 ohms

3165-530647: 5C84
Shipping Weight 10.89 lbs (4.93 kg)

Acclaim 5 Series 6.5” In-Wall, 85 watts

2-way in-wall speaker pair
6.5” vacuum formed polypropylene woofer with a 1.0” pivoting silk tweeter,
power handling from 10 – 85 watts at 8 ohms

3165-530678: 5W62
Shipping Weight 9.13 lbs (5.67 kg)

Acclaim 5 Series 6.5” In-Wall, 100 watts

2-way in-wall speaker pair
6.5” injection molded polypropylene and Kevlar woofer with a 1.0” pivoting silk tweeter, power
handling from 10 – 100 watts at 8 ohms

3165-530685: 5W64
Shipping Weight 9.22 lbs (4.19 kg)

Acclaim® Architectural Loudspeakers

Model	Type	Woofer	Woofer Material	Tweeter	Tweeter Material	Frequency Range (-6dB/+0dB)
7 Series In-Ceiling						
7C51	2-way	5.25”	Vacuum Form Polypropylene	13mm	PEI	45Hz–20kHz
7C72	2-way	7”	Vacuum Form Polypropylene	25mm	Silk	38Hz–20kHz
7C74	2-way	7”	IMPP Ribbed Cone	25mm	Silk	34Hz–20kHz
7C74S	Single-Point-Stereo	7”	IMPP Ribbed Cone	(2) 25mm	Silk	28Hz–20kHz
7C75	2-way	7”	Aluminum	25mm	Teteron	36Hz–20kHz
7C76	2-way	7”	Yellow Kevlar	25mm	Titanium	42Hz–22kHz
7C85	2-way	8”	Aluminum	25mm	Teteron	31Hz–20kHz
7C85S	Single-Point-Stereo	8”	Aluminum	25mm	Teteron	25Hz–20kHz
7C86	2-way	8”	Yellow Kevlar	25mm	Titanium	32Hz–22kHz
7 Series In-Wall						
7W75	2-way	7”	Aluminum	25mm	Teteron	36Hz–20kHz
7W76	2-way	7”	Yellow Kevlar	25mm	Titanium	42Hz–22kHz
7W86	3-way	8”	Yellow Kevlar	25mm	Titanium	32Hz–22kHz
7W55LCR	2-way	5.25”	Aluminum	25mm	Teteron	44Hz–20kHz
7W51SFT	Single-Point-Stereo	5.25”	Vacuum Form Polypropylene	(2)13mm	PEI	50Hz - 20kHz
7W52FT	2-way	5.25”	Vacuum Form Polypropylene	25mm	Silk	51Hz - 22kHz
5 Series In-Ceiling						
5C51	2-way	5.25”	Vacuum Form Polypropylene	13mm	PEI	54Hz–20kHz
5C51S	Single-Point Stereo	5.25”	Vacuum Form Polypropylene	(2) 13mm	PEI	49Hz–20kHz
5C61	2-way	6.5”	Vacuum Form Polypropylene	13mm	PEI	46Hz– 20kHz
5C62	2-way	6.5”	Vacuum Form Polypropylene	25mm	Silk	46Hz–20kHz
5C61S	Single-Point Stereo	6.5”	Vacuum Form Polypropylene	(2) 13mm	PEI	43Hz–20kHz
5C82	2-way	8”	Vacuum Form Polypropylene	25mm	Silk	30Hz–20kHz
5C84	2-way	8”	IMPP W/ Kevlar Filler	25mm	Silk	28Hz–20kHz
5 Series In-Wall						
5W62	2-way	6.5”	Vacuum Form Polypropylene	25mm	Silk	46Hz–20kHz
5W64	2-way	6.5”	IMPP W/ Kevlar Filler	25mm	Silk	44Hz–20kHz

Model	Type	Woofer	Woofer Material	Tweeter	Tweeter Material	Frequency Range (-6dB/+0dB)
Acclaim 5 Outdoor Speaker						
5B45	2-way	4”	IMPP cone	25mm	Teteron	80Hz - 20kHz
5B55	2-way	5.25”	IMPP cone	25mm	Teteron	72Hz - 20kHz
5B65	2-way	6.5”	IMPP cone	25mm	Teteron	64Hz - 20kHz
5B65S	Single-Point-Stereo	6.5”	IMPP cone	(2) 25mm	Teteron	62Hz - 20kHz

Grille Type	Sensitivity dBSPL (2.83V @ 1m)	Nominal Impedance	Max Amp. Power	Feature	Cutout Dimensions	Depth	Rough-in Bracket
Aluminum	87.5 dB	6 ohm	75W	Twist and tilt 15 degrees	6.75”	4.5”	SB-C50
Aluminum	91 dB	6 ohm	85W	Twist and tilt 15 degrees	8.375”	4.5”	SB-C67
Aluminum	90 dB	6 ohm	100W	Twist and tilt 15 degrees	8.375”	4.5”	SB-C67
Aluminum	90 dB	6 ohm/6 ohm	100W	Twist and tilt 15 degrees	8.375”	4.5”	SB-C67
Aluminum	90 dB	6 ohm	125W	Twist and tilt 15 degrees	8.375”	4.75”	SB-C67
Aluminum	90 dB	4, 5, 6 ohm	150W	Twist and tilt 15 degrees	8.375”	4.75”	SB-C67
Aluminum	91 dB	6 ohm	125W	Twist and tilt 15 degrees	9.875”	5.0”	SB-C80
Aluminum	91 dB	6 ohm/6ohm	125W	Twist and tilt 15 degrees	9.875”	5.0”	SB-C80
Aluminum	91 dB	4, 5, 6 ohm	150W	Twist and tilt 15 degrees	9.875”	5.125”	SB-C80
Aluminum	88 dB	6 ohm	125W	Iso-mount	13” x 8.25”	3.6”	SB-W70
Aluminum	90.5 dB	4, 5, 6 ohm	150W	Iso-mount	13” x 8.25”	3.9”	SB-W70
Aluminum	90 dB	4, 5, 6 ohm	150W	Iso-mount	15.125” x 9.125”	3.9”	SB-W83
Aluminum	90 dB	4, 5, 6 ohm	100W	Iso-mount	7.25 x 14.25”	3.9”	SB-7LCR
Magnetic Aluminum	88 dB	6 ohm/ 6 ohm	75W	Iso-Mount	7.4 x 7.4”	3.8”	SB-FT50
Magnetic Aluminum	88 dB	6 ohm	85W	Iso-Mount	7.4 x 7.4”	3.8”	SB-FT50
Steel	87 dB	8 ohm	75W	—NA—	6.75”	3”	SB-C50
Steel	87 dB	6 ohm/6 ohm	75W	—NA—	6.75”	3”	SB-C50
Steel	87 dB	8 ohm	75W	—NA—	8.375”	3.5”	SB-C67
Steel	87 dB	8 ohm	85W	—NA—	8.375”	3.5”	SB-C67
Steel	87 dB	6 ohm/6 ohm	75W	—NA—	8.375”	3.5”	SB-C67
Steel	88 dB	8 ohm	125W	—NA—	9.875”	4.2”	SB-C80
Steel	89 dB	8 ohm	150W	—NA—	9.875”	4.2”	SB-C80
Steel	87 dB	8 ohm	85W	—NA—	10.75”x 6.75”	3.3”	SB-W60
Steel	87 dB	8 ohm	100W	—NA—	10.75”x 6.75”	3.3”	SB-W60

Grille Type	Sensitivity dBSPL (2.83V @ 1m)	Nominal Impedance	Max Amp. Power	Surface mount	Pole Mount	Bookshelf Stand
Aluminum	88 dB	8 ohm	100W	Yes	Yes	Yes
Aluminum	90 dB	8 ohm	125W	Yes	Yes	Yes
Aluminum	91 dB	8 ohm	150W	Yes	Yes	Yes
Aluminum	91 dB	8 ohm/8 ohm	150W	Yes	Yes	No

Acclaim® Architectural Loudspeakers

Acclaim™ 5 Series OutBack

Acclaim 5 Series 4” Outdoor 2-way, 100 Watts

Woofer: 4” IMPP cone, Tweeter: 1” Teteron™ Mounting Options: Bookshelf foot, pole, flat or corner surface, Terminals: 12 gauge spring terminal Bookshelf foot included, 10 - 100 watts, 8 ohm, Dimensions: 9.5” x 6.25” x 6.25 (24.13 x 15.87 x 15.87 cm)

3165-532832: White 5B45
3165-532870: Black 5B45
Shipping Weight: 3.9 lbs. (1.8 kg)

Acclaim 5 Series 5.25” Outdoor 2-way, 125 Watts

Woofer: 5.25” IMPP cone, Tweeter: 1” Teteron, Mounting Options: Bookshelf foot, pole, flat or corner surface, Terminals: 12 gauge spring terminal, Bookshelf foot included, 10 - 125 watts, 8 ohm. Dim: 11.25” x 7.5” x 7.5” (28.57 x 19.05 x 19.05 cm)

3165-532849: White 5B55
3165-532887: Black 5B55
Shipping Weight: 5.4 lbs. (2.4 kg)

Acclaim 5 Series 6.5” Outdoor 2-way, 150 Watts

Woofer: 6.5” IMPP cone, Tweeter: 1” Teteron, Mounting Options: Bookshelf foot, pole, flat or corner surface, Terminals: 12 gauge spring terminal, Bookshelf foot included, 10- 150 watts, 8 ohm, Dimensions: 13” x 8.75” x 8.25” (33.02 x 22.22 x 20.95 cm)

3165-532856: White 5B65
3165-532894: Black 5B65
Shipping Weight: 7.1 lbs. (3.2 kg)

Acclaim 5 Series 6.5” Outdoor Single Point Stereo, 150 Watts

Woofer: 6.5” (165 mm) IMPP cone, Tweeter: (2) 1” (25 mm) Teteron, Mounting Options: Pole, flat or corner surface, Terminals: 12 gauge spring terminal, 10 - 150 watts, 8 ohm/8 ohm, Dim: 13” x 8.75” x 8.25” (33.02 x 22.22 x 20.95 cm)

3165-532863: White 5B65S
3165-532900: Black 5B65S
Shipping Weight: 7.2 lbs. (3.3 kg)

OutBack Rock Speakers



Gray Granite
3120-524141: OB-R6G
Shipping Weight 12.5 lbs (5.7 kg)

White Sandstone
3120-524158 OB-R6W
Shipping Weight 12.5 lbs (5.7 kg)

Fieldstone
3120-524165: OB-R6F
Shipping Weight 12.5 lbs (5.7 kg)

OutBack Rocks

Russound’s OutBack Rock Speakers, blend into any landscape, withstand the elements and were optimized for outdoor audio performance. The cast enclosure is made from a glass-reinforced resin to provide a sturdy, waterproof cabinet with low acoustic resonance for better sound. Impedance: 8 ohms. Efficiency: 89dB (1 watt @ 1 meter) Recommended power handling: 10-100 watts. 14” W x 10” H x 9.25” D (35.6 x 25.4 x 23.5 cm)

Coming Soon

New 8” Rock Speakers

Rough-In Speaker Brackets



5.25" In-ceiling Rough-in Bracket
3901-530715: SB-C50

6-Pack
3901-531804: SB-C50-6P

6.5" In-ceiling Rough-in Bracket
3901-530722: SB-C67

6-Pack
3901-531811: SB-C67-6P

8" In-ceiling Rough-in Bracket
3901-530739: SB-C80

6-Pack
3901-531828: SB-C80-6P



6.25" In-wall Rough-in Bracket
3901-530746: SB-W60

6-Pack
3901-531835: SB-W60-6P



8" In-wall Rough-in Bracket
3901-530760: SB-W80

6-Pack
3901-531859: SB-W80-6P



Acclaim 7 Series 5.25" LCR In-wall Rough-in Bracket
3901-530791: SB-7LCR

6-Pack
3901-531880: SB-7LCR-6P



Acclaim 7 Series 7" In-wall Rough-in Bracket
3901-530753: SB-W70

6-Pack
3901-531842: SB-W70-6P



Acclaim 7 Series 8" 3-way In-wall Rough-in Bracket
3901-530777: SB-W83

6-Pack
3901-531866: SB-W83-6P



Acclaim 7 Series Fixed Tilt Rough-in Bracket
3901-532795: SB-FT50

6-Pack
3901-532801: SB-FT50-6P

Flexbox Back boxes

Flexbox

speaker back boxes reduce background noise, provide a moisture barrier, diffuse distortion, and improve sound quality. The flexible construction allows for easy installation in retrofit or new construction settings. Both models are flame retardant and meet ASTM E119 and UL 263/ NFPA 251 (1-hour) and ASTM E84/ NFPA 70 standards.

1



2

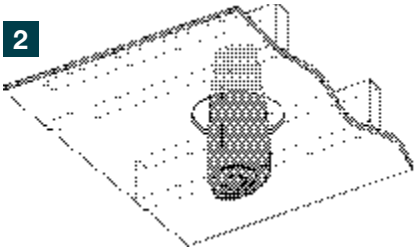

3

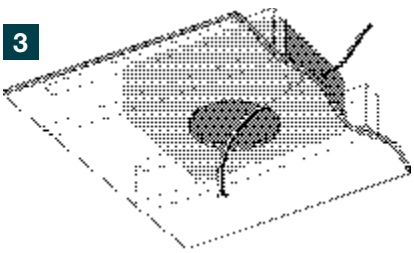

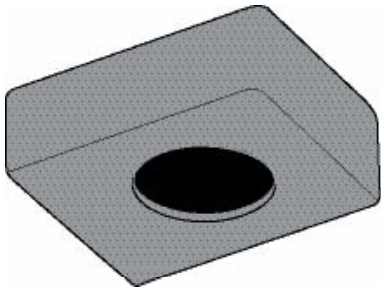

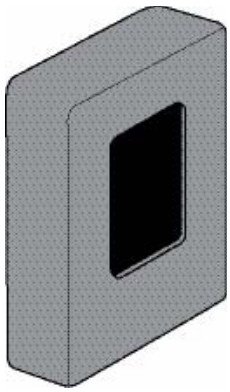

Flexbox Fire Rated In-Ceiling Back Box

Dim:14"W x 6"D x 17.5"H (355 x 152 x 445 mm)
Material Thickness: 1" (25 mm) nominal thickness
Weight: 6.7 lbs (3 kg)
Material: Proprietary Composite Material
STC Rating: 32, Flame Spread: 23
Smoke Density: 30 (ASTM E84/ NFPA 70)
Thermal Value: R 4.2
Temperature Range: -40º F to 350º F
(-40º C to 177º C)
Fire Rating: CLASS 1 Fire Rated ASTM E119 /NFPA 251 and UL 263 for 1 Hour Fire Rating

3801-531286: FBC1-FR

Ship Weight 7.8 lbs

Flexbox Fire Rated In-Wall Back Box

Dim: 14"W x 3.65"D x 16.5"H (368 x 89 x 406 mm)
Material Thickness: 1" (25 mm) nominal thickness
Weight: 5.4 lb (2.4 kg)
Material: Proprietary Composite Material
STC Rating: 32, Flame Spread: 23
Smoke Density: 30 (ASTM E84/ NFPA 70)
Thermal Value: R 4.2
Temperature Range: -40º F to 350º F
(-40º C to 177º C)
Fire Rating: CLASS 1 Fire Rated ASTM E119 /NFPA 251 and UL 263 for 1 Hour Fire Rating

3801-531262: FBW1-FR

Ship Weight 6.2 lbs

R-Series Amplifiers

R-Series Amplifiers– 2 Channel

NEW

Two-channel Amplifier With Automatic Local Source Switching (50 Watts Per Channel)

Autosensing enables localized speaker override for a connected peripheral, such as a TV or PC. The Bridgeable power setting combines channel power for 125 watts into a single 8-ohm load, rated 50 watts per channel RMS @ 8 Ohms. 1U 1/2 rack chassis has three mounting options. 8.45" W x 10.25" D x 1.75" H (21.4 x 26.0 x 4.45 cm) 4.8 lbs. (2.16 kg.)

2800-533280: D250LS
2800-533297: D250LS EU
Shipping Weight 10 lbs (4.5 kg)

Two-Channel Dual Source Amplifier (90 watts per channel)

Two-channel, Dual source, 90-watt amplifier with auto-source switching. Features primary and secondary audio inputs, loop output, selectable speaker level input, and 12V trigger input and output. Rated at 90 watts per channel into 8 ohms, 110 watts into 4 ohms, and bridgeable to 250 watts of power into a single 8-ohm load.

2800-530463: R290DS
2800-532719: R290DS EU/UK
Shipping Weight 24.30 lbs (11.02 kg)

R-Series Amplifiers– Multi Channel

Four Zone/Eight-Channel Multiroom Amplifier (50 watts per channel)

Protection circuitry provides safety and reliability under heavy use. Amplifies up to four stereo line-level sources. Zones have dedicated line level inputs or can share a source via the bus input. Separate gain controls for each zone to preset room sound levels. Zone output can be switched to stereo or bridge mono output. In bridged mode, a zone's left and right channels are combined for a higher-power mono output, ideal for large rooms or outdoor listening areas. A+B speaker output in 4 ohm mode. Rack ears included. 50 watts per channel RMS @ 8 Ohms x 8 17" W x 16.5"D x 5.875"H (43 x 42 x 15 cm)

2800-521904: R850MC
2800-532696: R850MC EU/UK
Shipping Weight 51 lbs (23 kg)

Six Zone/Twelve-Channel Multiroom Amplifier (50 watts per channel)

Zones have dedicated line level inputs or can share a source via the bus input. Separate gain controls for each zone to preset room sound levels. Zone output can be switched to stereo or bridge mono output. In bridged mode, a zone's left and right channels are combined for a higher-power mono output, ideal for large rooms or outdoor listening areas. A+B speaker output in 4 ohm mode. Rack ears included. 50 watts per channel RMS @ 8 Ohms x 12. 17" W x 16.5"D x 5.875"H (43 x 42 x 15 m)

2800-521881: R1250MC
2800-532702: R1250MC EU/UK
Shipping Weight 61.25 lbs (27.8 kg)

X-Series Amplifiers

Two-channel stereo amplifiers featuring signal-sensing inputs, front mounted volume and balance controls, bridgeable outputs, and A/B speaker switching, front mounted volume, balance and A/B speaker controls

NEW

Two-Channel Dual Source Amplifier (75 watts per channel)

Featuring dual line level inputs, a signal line level output, and 75 watts per channel at 4 Ohms, 60 watts per channel at 8 Ohms and is bridgeable to 160 watts at 8 Ohms.

2800-533020: X75
Shipping Weight 11.5 lbs (5.22 kg)

NEW

Two-Channel Dual Source Amplifier (125 watts per channel)

Features dual line level inputs, line level outputs, 12v triggers, adjustable signal delay time and rear gain adjustments for each channel. Delivers 125 watts per channel at 4 Ohms, 80 watts per channel at 8 Ohms and is bridgeable to 250 watts at 8 Ohms.

2800-533037: X125
Shipping Weight 31.4 lbs (14.24 kg)

NEW

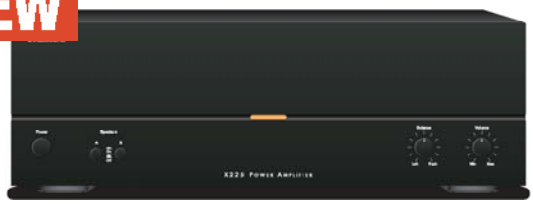

Two-Channel Dual Source Amplifier (225 watts per channel)

Features dual line level inputs, line level outputs, 12v triggers, adjustable signal delay time and rear gain adjustments for each channel. Delivers 225 watts per channel at 4 Ohms, 150 watts per channel at 8 Ohms and 470 watts at 8 Ohms bridged.

2800-533044: X225
Shipping Weight 40.4 lbs (18.33 kg)

Volume Controls

ALTx Series 126 Watts

ALTx-2D

Volume control, with Decora® insert and knob. (cover plate included). detachable 12 gauge connector. (1x, 2x, 4x, 8x) impedance matching. 1.75" W x 2.5" H x 2.5" D (44.5 x 63.5 x 63.5 mm)

6100-526893: White, Almond & Bone
6100-114748: Black
6100-114250: Brown

Shipping Weight
2 lbs (.9kg)

ALTx-2

Volume Control, with standard plate and knob detachable. 12 gauge connector. (1x, 2x, 4x, 8x) impedance matching. 1.75" W x 2.5" H x 2.5" D (44.5 x 63.5 x 63.5 mm)

6100-526886: White, Almond & Bone
6100-116377: Black
6100-113666: Brown

Shipping Weight
2 lbs (.9kg)

ALTx-WIRi 2D

Volume Control with Built-in Infrared Receiver. Decora® insert and knob (cover plate included). 12 position switch. Accepts up to 14 gauge wire. 1x, 2x, 4x, 8x impedance matching. 1.75" W x 2.5" H x 2.9375" D (44.5 x 63.5 x 74 mm)

6100-117084: White
6100-117091: Almond
6100-117107: Bone
6100-117954: Black
6100-117961: Brown

Shipping Weight
1 lbs (.5kg)

WALTx-2

Weatherproof Volume Control with Standard Plate and Knob. 12 position switch, 1x and 2x, 4x, 8x impedance matching. Fits a standard 3/4" PVC Outdoor conduit. Gray only.3" W x 5" H x 3.75" D (76.5 x 127 x 95.5 mm)

6500-114113

Shipping Weight
1.75 lbs (.79 kg)

ALTX Master Packs

ALTx-MP-1

Contains (30) ALTx-2D volume controls.

6100-526923: White, Almond & Bone
6100-116476: Black
6100-116483: Brown

Shipping Weight
37 lbs (16.7kg)

ALTx-MP-2

Contains (30) ALTx-2 volume controls

6100-526947: White, Almond & Bone
6100-116520: Black
6100-116537: Brown

Shipping Weight
37 lbs (16.7kg)

LPTx Series 75 Watts

LPTx-2

Volume Control, with standard plate and knob accepts up to 14 gauge wire. 1x, 2x, 4x, 8x impedance matching. 1.75" W x 2.75" H x .625"D (44.5 x 70 x 66.7 mm)

6200-114991: White
6200-115141: Almond
6200-114090: Bone

Shipping Weight
1.25 lbs (.57 kg)

LPTx-2D

Volume Control, with Decora® insert and knob (cover plate included). Accepts up to 14 gauge wire. 1x, 2x, 4x, 8x impedance matching. 1.75" W x 2.75" H x 2.625"D (44.5 x 70 x 66.7 mm)

6200-113512: White
6200-113536: Almond
6200-113529: Bone

Shipping Weight
1.25 lbs (.57 kg)

LPTX Master Packs

LPTx-MP-1

Contains (30) LPTx-2D volume controls

6200-116551: White
6200-116544: Almond
6200-116568: Bone

Shipping Weight
37 lbs (16.7kg)

LPTx-MP-2

(30) LPTx-2

6200-116582: White
6200-116575: Almond
6200-116599: Bone

Shipping Weight
37 lbs (16.7kg)

Snap Connectors

(4) Snap connectors

9590-531774: SC4P

Shipping Weight
1 lbs (.5kg)

Color Conversion Components

SP-6

(6) Plastic plates for ALTx & LPTx models.

9510-115110: White
9510-115080: Almond
9510-115097: Bone
9510-115073: Black
9510-115103: Brown
Shipping Weight
1 lbs (.5kg)

ACRP26

(6) Decora® cover plates. Fits ALTx, LPTx models.

7105-115479: White
7105-115493: Almond
7105-115486: Bone
7105-115509: Black
7105-115516: Brown
Shipping Weight
1 lbs (.5kg)

DP-6

(6) Decora® inserts. Fits ALTx, LPTx models.

9510-115165: White
9510-115127: Almond
9510-115660: Bone
9510-115134: Black
9510-115158: Brown
Shipping Weight
1 lbs (.5kg)

DP-WIR

IR Conversion kit with IR receiver and Decora®. For use with ALTx, LPTx and A70-1M models.

5100-115820: White
5100-115806: Almond
5100-115813: Bone
5100-118807: Black
5100-118791: Brown
Shipping Weight
1 lbs (.5kg)

VCK-6

(6) Plastic Volume Control Knobs. Fits ALTx, and LPTx models.

9510-115219: White
9510-115172: Almond
9510-115196: Bone
9510-115189: Black
9510-115202: Brown
Shipping Weight
1 lbs (.5kg)

Special Application Volume Control

Table Top Volume Control

126 Watt with headphone jack speaker override. Installer configurable from 1x, 2x, 4x or 8x impedance matching.
6.0625" W x 2.5" H x 1.9375" D (154 x 63.5 x 49.3 mm)

6400-113161: TBL-75
Shipping Weight 2.5 lbs (1.1kg)

Modular Speaker Connecting Blocks



Modular Speaker Connecting Base Unit

4 speaker outputs and 1 amplifier input. Color-coded detachable 14-gauge snap connectors to support 4 zones.
4.25" W x .75" H x 1.75" D
(108 x 19.1 x 44.5 mm)

8100-120961: EZB-1SC
Shipping Weight 6oz (.2kg)



Modular Speaker Block Add-on

Adds 4 Speaker Outputs to EZB-1SC to expand to 8 Zones.
3.625" W x .75" H x 1.75" D
(92.1 x 19.1 x 44.5 mm)

8100-120978: EZB-2SC
Shipping Weight 6oz (.2kg)

Speaker Selectors

SS Series Single Source Selectors

4 pr. Speaker Selector, Single Source

100W/Ch. RMS, zone label. 4 Ω stable amplifiers & receivers. Resettable circuit protection. Impedance bypass switch for use with impedance matching volume controls. 8.5" W x 1.875" H x 6.25" D
(22 x 4.8 x 16 cm)

3630-520679: SS-4.2
Shipping Weight
2.75 lbs (1.2kg)

6 pr. Speaker Selector, Single Source

70W/Ch. RMS, zone labels. 4 Ω stable amplifiers & receivers. Resettable circuit protection. Impedance bypass switch for use with impedance matching volume controls. 11.5" W x 1.875" H x 6.25" D
(29.5 x 4.8 x 16 cm)

3630-520686: SS-6.2
Shipping Weight
3.5 lbs (1.6kg)

Autoformer-Based Speaker Selectors with Volume Control

2 Pair Speaker Selector

100W/Ch. RMS.Color-coded detachable 14-gauge snap connector standard configuration is 4x - Installer may change configuration to 2x or 8x. Zone identifying labels included. 8.5" W x 3" H x 6.25" D (22 x 8 x 16 cm)

3615-604010: SDB-2.1
Shipping Weight
5.5 lbs (2.5 kg)

4 Pair Speaker Selector

200W/Ch. RMS. Color-coded detachable 14-gauge snap connectors. Standard configuration is 4x - Installer may change configuration to 2x or 8x. Zone identifying labels included. 17" W x 3" H x 6.25" D (43.5 x 8 x 16 cm)

3615-604027: SDB-4.1
Shipping Weight
9 lbs 4.1kg)

6 pair Speaker Selector

150 W/Ch. RMS. Color-coded detachable 14-gauge snap connectors. Standard configuration is 8x - Installer may change configuration to 2x or 4x. Zone identifying labels included. 17" W x 3" H x 6.25" D (43.5 x 8 x 16 cm)

3615-604034: SDB-6.1
Shipping Weight
11 lbs (5 kg)

Autoformer-Based Speaker Selectors

6 pair Speaker Selector/Impedance Matching

100W/Ch. RMS with subsonic filter built in. Color-coded detachable 14-gauge snap connectors. Zone identifying labels included. 17" W x 2.875" H x 8" D (43.5 x 7.5 x 20.5 cm)

3610-603075: PRO-6 HP
Shipping Weight
9.5 lbs (4.3 kg)

8 pair Speaker Selector/Impedance Matching

100W/Ch. RMS with subsonic filter, built in. Color-coded detachable 14-gauge snap connectors. Zone identifying labels included. 17" W x 2.875" H x 8" D
(43.5 x 7.5 x 20.5 cm)

3610-603136: PRO-8 HP
Shipping Weight 10 lbs (4.5kg)

12 pair Speaker Selector/Impedance Matching

100W/Ch. RMS with subsonic filter built in. Color-coded detachable 14-gauge snap connectors. Zone identifying labels included. 17" W x 2.875" H x 8" D (43.5 x 7.5 x 20.5 cm)

3610-603037: PRO-12 HP
Shipping Weight 10 lbs (4.5kg)

Miscellaneous Speaker Selectors

In-Wall, Dual-Source Selector

Allows a single pair of speakers to be driven by either of two amplifiers or allow a single amplifier to drive either of two pair of speakers. Decora® wallplate not included. 1" W x 2.75" H x 1.75" D
(25.5 x 70 x 44.5 mm)

3699-520501: White AB-1.2
3699-520532: Almond AB-1.2
3699-520556: Bone AB-1.2
3699-521294: Brown AB-1.2
3699-521317: Black AB-1.2
Shipping Weight 3 oz (85 g)

Tabletop,Dual-Source Selector

Dual-source selector switch tabletop unit, allow a single pair of speakers to be driven by either of two amplifiers or allow a single amplifier to drive either of two pair of speakers.5.5" W x 2.875" H x 3" D
(140 x 73.5 x 76.5 mm)

3699-520525: AB-2.2
Shipping Weight 1.25 lbs (.57 kg)

Automatic Source Selector

Automatic A/B speaker selector, speaker level switching, selectable delay and sensitivity. Color-coded detachable 14-gauge snap connectors. Detachable 12VDC power supply
6.25" W x 2" H x 1.55" D (159 x 51 x 39 mm)

3699-520914: AB-3.2
3699-521270: AB-3.2 EU
3699-521287: AB-3.2 UK
Shipping Weight 1.7 lbs (.8kg)

ComPoint
Adv. 4 zone kit w/Door Station

Includes 6 advanced keypads (ISK2) with white and almond conversion plates, hub (ISH1), and power supply (ISPS) and antiqued brass finish door station (ISK3).
Wall plate and speakers not included.

2300-527029: ISA4
2300-527470: ISA4 EU
2300-527487: ISA4 UK
Shipping Weight 6.5 lbs. (2.9 kg)

*EU/UK kits contain screwless wallplates

ComPoint Adv. 6 zone kit

Includes 6 advanced keypads (ISK2) with white and almond conversion plates, hub (ISH1), and power supply (ISPS).
Wall plate and speakers not included.

2300-526800: ISA60
2300-527234: ISA60 EU
2300-527227: ISA60 UK
Shipping Weight 6.7 lbs. (3 kg)

*EU/UK kits contain screwless wallplates

ComPoint Adv. 6 zone kit w/Door Station

Includes 6 advanced keypads (ISK2) with white and almond conversion plates, hub (ISH1), power supply (ISPS) and antiqued brass finish door station (ISK3).
Wall plate and speakers not included.

2300-526404: ISA6
2300-527258: ISA6 EU
2300-527241: ISA6 UK
Shipping Weight 7.6 lbs. (3.4 kg)

*EU/UK kits contain screwless wallplates

ComPoint Adv. 6 zone w/ 2 Door Stations

Includes 6 advanced keypads (ISK2) with white and almond conversion plates, hub (ISH1), power supply (ISPS) and two antiqued brass finish door stations (ISK3).
Wall plate and speakers not included

2300-526411: ISA62
2300-527272: ISA62 EU
2300-527265: ISA62 UK
Shipping Weight 8.5 lbs. (3.6 kg)

*EU/UK kits contain screwless wallplates

ComPoint Basic Keypad

Single-gang Decora® style keypad. Selects zones and door stations, controls receive volume, sets Do Not Disturb. Internal microphone with automatic gain control. Built-in amplifier powers one or two external speakers. 110 punch-down. Installer-selectable amber or green key backlighting.
Wall plate and speakers not included. 1.875" W x 4" H x 2.25" D (4.8 x 10.2 x 5.7 cm)

2300-528286: White & Almond ISK1
2300-526299: Bone ISK1
2300-526312: Brown ISK1
2300-526329: Black ISK1
Shipping Weight 4.8 oz (136g)

ComPoint Advanced Keypad

Single-gang Decora® style keypad. Five-character LCD display ,assignable zone names and indicates functions and volume level. Selects zones and door stations, controls receive volume, sets Do Not Disturb. Internal microphone with automatic gain control. Built-in amplifier powers one or two external speakers. Speaker relay allows the keypad to share speakers with an audio system for high-fidelity communications. 110 punch-down. Installer-selectable amber or green backlighting. (Required for systems with over 6 zones.) **Wall plate and speakers not included.**
1.875" W x 4" H x 2.625" D (4.8 x 10.2 x 6.7 cm)

2300-525384: White & Almond ISK2
2300-526336: Bone ISK2
2300-526350: Brown ISK2
2300-526367: Black ISK2
Shipping Weight 5.6 oz (159g)

ComPoint Door Station

Weatherproof call station fits a single-gang deep wall box. Plated die-cast zinc cover plate mounts flush to exterior wall. Internal microphone with automatic gain control. Built-in amplifier and speaker. 110 punch-down connector for CAT-5 cable. Internal relay with screw terminals for connecting to an external doorbell. Amber-backlighted Call key. 3" W x 5.125" H x 3" D (7.6 x 13.0 x 7.6 cm)
Maximum 2 Door Stations per system.

2300-525407: Antique Brass ISK3
2300-525414: Brushed Chrome ISK3
Shipping Weight 9 oz (.26 kg

ComPoint Camera Door Station

Weatherproof call station fits a double-gang deep wall box. Plated die-cast zinc cover plate mounts flush to exterior wall. Black and white CCTV **NTSC ONLY** camera. Internal microphone with automatic gain control. Built-in amplifier and speaker. 110 punch-down connector for CAT-5 cable. Internal relay with screw terminals for connecting to an external doorbell. Amber-backlighted Call key. Maximum 2 Door Stations per system.

2300-528880: Antique Brass ISK4
2300-528897: Brushed Chrome ISK4
Shipping Weight 9 oz (.26 kg)

ComPoint Speaker

Single-gang Decora®-style in-wall speaker for use with the ComPoint intercom system. It installs beside a ComPoint keypad in a double-gang wall box. The ISSP allows ComPoint to be used as a stand-alone system. The high-quality driver in the ISSP is ideally matched to the keypad amplifier. Its moisture-resistant design makes it suitable for use in bathrooms and kitchens. Wall plate not included. 3" W x 5.125" H x 3" D (7.6 x 13.0 x 7.6 cm)
2300-528279: (White & Almond) ISSP
Shipping Weight 8 oz (227g)

Color Conversion Kit for ISSP

Includes (4) Grilles.
Shipping Weight 2oz (.1kg)|
Wall plates and speakers not included.

2300-530494: White
2300-530500: Almond
2300-528446: Bone
2300-528453: Brown
2300-528460: Black
Shipping Weight 8 oz (227g)

ComPoint Hub

Six-zone surface- or panel-mount controller for the ComPoint system. Up to 6 hubs can link together for a total of 36 zones. Supports 2 door stations and provides 7 doorbell chimes, individually selectable for each door. Gain control for doorbell volume. RJ-45 connectors for keypads, door stations, and hub linking. Firmware updatable. Power supply not included. 6" W x 5" H x 2" D (15.2 x 12.7 x 5.1 cm)
2300-526459: ISH1
Shipping Weight 2 lbs. (.9 kg)

Advanced Programming Cable

Advanced programming cable for ComPoint components (ISK1, ISK2, ISK3, ISH1). Female DB-9 connection (PC end) and flat device pin connection (device end). 72" L (182.9 cm)
2500-521065
Shipping Weight 1 lbs.(0.45 kg)

ComPoint Power Supply

15VDC 3.5A. Autosensing 100V-240VAC, detachable power cord, compact size.
4.56" W x 1.93" H x 1.33" D (115.8 x 49 x 33.8 mm)
2300-526282: ISPS
2300-526763: ISPS EU
2300-526770: ISPS UK
Shipping Weight 1lbs. (.5kg)

ComPoint Door Strike Release Module

Surface-mount module connects between the hub and a door station to provide relay contacts for a third-party door strike release or other device. 110 punch-down connector for CAT-5 cable. Screw terminals for access to common, NC and NO relay contacts. Relay rated for 1 A @ 12 VDC. 3" W x 1.875" H x 1" D (7.6 x 4.8 x 2.5 cm)
2300-525445: ISDR1
Shipping Weight 9 oz (.12 kg)

SaphIR Table Top Receivers

SaphIR Mini-Tabletop IR receiver

The receiver is CFL-friendly and has a front panel mounted blue talk back indicator. 84" cable with 1/8" stereo mini-plug. 12 VDC.
2.28" W x .72" H x 1.68" D (55 x 18 x 42 mm)

5100-121951: 854
Shipping Weight 3 oz (85 g)



SaphIR Mini-Tabletop Kit

Includes our 854 table top IR receiver, 857 connection block, 846C power supply and (4) 845.1 IR emitters.

5100-521508: IRJ-1
Shipping Weight 1.5 lbs (.68 kg)

SaphIR Plasma-Friendly Table Top IR receiver

Designed for Home Theater applications which use Plasma screens

5100-525933: 854P
Shipping Weight 3 oz (85 g)



SaphIR Plasma Friendly Mini-Tabletop Kit

Kit includes the 854P plasma-friendly tabletop IR receiver, 857 IR connection block, 846C power supply and (4) 845.1 IR emitters.

5100-526602: IRJ-1P
Shipping Weight 1.5 lbs (.68 kg)

SaphIR Eye Receivers

SaphIR Eye

862 Eye IR receiver is a flush-mounting design which mounts in a .5" hole. The 862 Eye is CFL-friendly and provides a blue talk back indicator visible from the front of the Eye. The 862 Eye is packaged with trim bezels in White, Black and Brass for installation flexibility. 77" cable length, stripped and tinned leads and a screw terminal strip.7/16" Diameter x 2 1/8" Long

5100-521362: 862
Shipping Weight 2 oz (57 g)



SaphIR Eye Kit

Kit includes our 862 Eye flush-mount IR receiver, 857 connection block, 846C power supply and (4) 845.1 IR emitters.

5100-521515: IRJ-2
Shipping Weight 1.5 lbs (.68 kg)

SaphIR Plasma-Friendly Eye

Designed to work in Home Theater applications which use Plasma screens. 77" cable length, stripped and tinned leads and a screw terminal strip. 7/16" Diameter x 2 1/8" Long

5100-521539: 862P
Shipping Weight 2 oz (57 g)



SaphIR Plasma Friendly Eye Kit

Kit includes the 862P Eye plasma-friendly flush-mount IR receiver, 857 IR connection block, 846C power supply and (4) 845.1 IR emitters.

5100-526619: IRJ-2P
Shipping Weight 1.5 lbs (.68 kg)

SaphIR Emitters

SaphIR Emitter

77" cable length.

5100-114076: 845.1
Shipping Weight 6oz (.2kg)

SaphIR Dual Head Emitter

77" cable length.

5100-113789: 1584.1
Shipping Weight 6oz (.2kg)

SaphIR LED Emitters

SaphIR LED Emitter

Stick-on emitter for controlling A/V equipment with highly sensitive IR receivers such as satellite receivers and cable boxes.77" cable length. .5" x .375" x .25"D (12.7 x 9.6 x 6.4 mm)

5100-530340: 845.2
Shipping Weight 6oz (.2kg)

Dual Head LED Emitter

Stick-on emitter for controlling A/V equipment with highly sensitive IR receivers such as satellite receivers and cable boxes. 77" cable length. .5" x .375" x .25"D (12.7 x 9.6 x 6.4 mm)

5100-530357: 1584.2
Shipping Weight 6oz (.2kg)

SaphIR®

SaphIR Phantoms

SaphIR Phantom

IR receiver that mounts anywhere. The receiver is CFL-friendly and has a blue talk back indicator visible at the front of the Phantom. Its small size makes it easy to hide in plain view. 77" cable length, stripped and tinned leads and a screw terminal strip. 7/16" W x 3/8" H x 2 1/8" D

5100-119620: White 860
5100-119637: Black 860
Shipping Weight 2 oz (57 g)



SaphIR Phantom Kit

Kit includes the 860 Phantom mini IR receiver, 857 IR connection block, 846C power supply and (4) 845.1 IR

5100-526626: IRJ-4
Shipping Weight 1 lbs (.5kg)

SaphIR Plasma-Friendly Phantom

Designed to work in Home Theater applications which use Plasma screens. 77" cable length, stripped and tinned leads and a screw terminal strip. 7/16" Diameter x 2 1/8" Long

5100-525957: Silver 860P
5100-525940: Black 860P
Shipping Weight 2 oz (57 g)



SaphIR Plasma-Freindly Phantom Kit

Kit includes the 860P Phantom plasma-friendly surface mount mini IR receiver, 857 connection block, 846C power supply and (4) 845.1 IR emitters.

5100-526633: IRJ-4P
Shipping Weight 1 lbs (.5kg)

SaphIR In-Wall Receivers

SaphIR In-Wall Receiver

mounts in a standard single-gang wall box. The receiver is CFL-friendly and provides a green LED indicator for Status and a blue LED indicator for talk back. 1.75" W x 4.3125" H x .375" D (44.5 x 63.5 x 63.5 mm)

Wall Plate not included.

5100-114458: White 858
5100-114465: Almond 858
5100-117923: Bone 858
5100-117930: Black 858
5100-117947: Brown 858
Shipping Weight 2 oz (57 g)



SaphIR In-Wall Receiver Kit

Kit includes our 858 in-wall IR receiver, 857 connection block, 846C power supply and (2) 1584.1 dual IR emitters.

Wall Plate not included.

5100-116308: White IRK-1
5100-116315: Almond IRK-1
Shipping Weight 1.5 lbs (.68 kg)

SaphIR Plasma-Friendly In-Wall IR receiver

Designed for Home Theater applications which use Plasma screens.

Wall Plate not included.

5100-521478: White 858P
5100-521423: Almond 858P
5100-521454: Bone 858P
5100-521430: Black 858P
5100-521461: Brown 858P
Shipping Weight 2 oz (57 g)



SaphIR Plasma-Friendly In-Wall Receiver kit

Includes our 858 in-wall IR receiver, 857 connection block, 846C power supply and (2) 1584.1 dual IR emitters.

Wall Plate not included.

5100-526640: White IRK-1P
5100-526695: Almond IRK-1P
Shipping Weight 1.5 lbs (.68 kg)

SaphIR Connecting Blocks

SaphIR Wall-Mounted Connecting Block

Front panel has 4 output jacks for IR emitters, an input jack for a system connection and an input jack for IR system power. A terminal block at the rear of the IRB-6 accepts connections from remotely located IR receivers. Single-gang box or p-ring. Uses standard Decora cover plates. (Available in white only) 1.4375" W x 2.625" H x 1.625" D (36.6 x 66.7 x 41.3 mm)

Wall Plate not included.

5100-113338: IRB-6
Shipping Weight 6 oz (.2kg)

SaphIR Connecting Block

IR Receiver, 6 emitters, a 12 volt power supply and a 12V Status power supply. LED's indicate power status and IR activity. 3.25" W x 1.85" H x 1" D (83 x 47 x 25 mm)

5100-115455: 857
Shipping Weight 4 oz (113 g)

SaphIR Connecting Block Kit

Includes our 857 connecting block and 846C power supply. Select the other components you need to complete your installation from our comprehensive SaphIR product line.

5100-521522: IRJ-3
Shipping Weight 1 lbs (.5kg)

SaphIR Power Supplies

12 Volt, 300mA Power Supply

6 foot cord terminating in 2.1mm coaxial plug. 110VAC
2" W x 2.375" H x 1.625" D
(50.8 x 60.4 x 41.3 mm)

5100-480034 846C
Shipping Weight 6 oz (.2 kg)

12 Volt,1000mA Power Supply

May be used to drive up to 4 SaphIR K2 Keypads. 6 foot cord terminating in 2.1mm coaxial plug. 110VAC
2.1875" W x 2.875" H x 2.0625" D (55.7 x 73.1 x 52.4 mm)

6300-111075 1201A
Shipping Weight 10 oz (.28 kg)

SaphIR Accessories

SaphIR Connection Terminal

IRB-1 is an effective way to connect an IR receiver to an IR control system. It provides a single jack in the front panel for the IR receiver connection and screw terminals at the rear for the in-wall IR wiring. Mounts in a single gang junction box or p-ring and uses standard Decora cover plates. (Available in white only) 1.4375" W x 2.625" H x 1.625" D (36.6 x 66.7 x 41.3 mm)
Wall plate and speakers not included.

5100-113321 IRB-1
Shipping Weight 6 oz (.2kg)

Receiver Extension

50 foot cable with stereo male/female 3.5mm mini connectors for extending receivers. 1.4375" W x 2.625" H (36.6 x 66.7 mm)

5200-480065: 900
Shipping Weight 4 oz (113 g)

SaphIR In-Wall IR receiver

Add-on for ALTx and LPTx volume controls and adds the capability to receive IR commands to an existing speaker volume control wall plate. The receiver is CFL-friendly and provides an LED indicator for system status.

5100-115820: White DP-WIR
5100-115806: Almond DP-WIR
5100-115813: Bone DP-WIR
5100-118807: Black DP-WIR
5100-118791: Brown DP-WIR
Shipping Weight 2 oz (57 g)

4 conductor, 22 gauge cable

2 pair twisted w/shield, 19/34 tinned copper, PVC jacket, temp. Rating 75° C, UL Type CL3, White jacket. 1000 foot pull-box only. Conducts sensitive IR signals and shields them from outside noise.

9000-115240: AW2260AB

CALL FOR PRICING

Miscellaneous

Universal Learning/ Programmable IR In-Wall Keypad

Source component library of over 1,000 devices, built-in IR receiver with talk back LED, display backlight switchable to green or amber. Controls up to 8 A/V components. Requires 1201A power supply.

Requires programing cable. 2500-121036

2500-528248: White/Almond K2
Shipping Weight 1.25 lbs (.57 kg)

S2/K2 Conversion kit

(1) Mounting plate,
(1) Insert Plate,
(1) Cover plate.

2500-528156: White
2500-528163: Almond
2500-528118: Bone
2500-528125: Black
2500-528132: Brown
Shipping Weight 2 oz (.1kg)

Remote Control

Complete solution for all of your remote control requirements. It is designed to operate source devices and Russound audio system keypads. Controls up to eight devices.

1210-524196: SRC2
Shipping Weight 5 oz. (.11 kg)



Download your FREE EZpro software from www.russound.com

SaphIR EZpro

Custom programming software allows the installer to quickly and easily setup many complex parameters for the SaphIR K2 keypad. Save and use programming for new jobs and to quickly recall and edit previous installations — saving time and money. Logical menus and a familiar interface make it user friendly. **Requires programing cable. 2500-12103**

Brushed Aluminum Cover plate
2500-530531
Shipping Weight 2oz (.071kg)

Two gang + single gang Cover Plate

SWP-S21
See pg. 42 for order info.

PlateMate®

PlateMate Home Theater



Home Theater Plate

For 5.1, 6.1 or 7.1 surround sound (14) 5-way binding posts (2) RCA-F connectors on heavy-duty molded plate. (2) powered subwoofers.

7101-524110: HTP-2
Shipping Weight 8 oz. (.23 kg)

Home Theater Plate

(12) 5-way binding posts, 7/16" hex head, (2) RCA-F connectors on double-gang standard plate. Hookup for passive or powered subwoofer.

7101-121807 : HTP-1
Shipping Weight 7 oz. (.2 kg)

PlateMate Spring Loaded Connectors

SL-2P

Crimp-on rear terminal on a standard pate.

7101-803017: White

SL-4P

Crimp-on rear terminal on a standard plate.

7101-803079: White

PlateMate 5-way Binding Post Connectors

BP1D

(2) PM-BP (1 Red and 1 Black)
(1) ACRP-26 Decora plate.

7101-850240

BP10D

(4) PM-BP (2 Red and 2 Black)
(1) ACRP-26 Decora plate.

7101-850486

PlateMate-6 packs

PM-MOD1S

Single gang plate with (1) modular hole. 6 pcs. Per box.

7104-112027: White
7104-112256: Bone
7104-120251: Almond

PM-MOD2S

Single gang plate with (2) modular holes. 6 pcs. Per box.

7104-112034: White
7104-112263: Bone
7104-120275: Almond

PM-MOD3S

Single gang plate with (3) modular hole. 6 pcs. Per box.

7104-112041: White
7104-112270: Bone
7104-120299: Almond

PM-MOD4S

Single gang plate with (4) modular holes. 6 pcs. Per box.

7104-113345: White
7104-113352: Bone
7104-120305: Almond

PM-MOD1D

Decora insert with (1) modular holes.

6 pcs per box.

7104-112058: White
7104-112287: Bone
7104-120244: Almond

PM-MOD2D

Decora insert with (2) modular holes. 6 pcs. Per box.

7104-112065: White
7104-112294: Bone
7104-120268: Almond

PM-MOD3D

Decora insert with (2) hex and (1) modular holes. 6 Pcs Per Box

7104-112072: White
7104-112300: Bone
7104-120282: Almond

PM-MOD4D

Decora insert with (4) modular holes. 6 pcs. Per box.

7104-520471: White
7104-520488: Bone
7104-520495: Almond

PlateMate Modular Plates 6-packs

PM-1S
1 hex hole. 6 pcs. Per box.
7104-111907 White
7104-112133 Bone

PM-2S
2 hex hole. 6 pcs. Per box.
Not used with PM-DB
7104-111914 White
7104-112140 Bone

PM-3S
3 hex hole. 6 pcs. Per box.
Not used with PM-DB
7104-111921 White
7104-112157 Bone

PM-4S
4 hex hole. 6 pcs. Per box.
Not used with PM-DB
7104-111938 White
7104-112164 Bone

PM-6S*
6 hex holes. 6 pcs. Per box.
Not used with PM-DB.
7104-111945 White
7104-112171 Bone

PM-8S*
Standard single gang plate with 8 hex holes. 6 pcs. Per box. Not used with PM-DB.
7104-111952 White
7104-112188 Bone

PM-1D
Decora insert with 1 hex hole. 6 pcs. Per box.
7104-111969 White
7104-112331 Almond
7104-112195 Bone

PM-2D
Decora insert with 2 hex hole. 6 pcs. Per box. **Not used with PM-DB**
7104-111976 White
7104-112348 Almond
7104-112201 Bone

PM-3D
Decora insert with 3 hex hole. 6 pcs. Per box. **Not used with PM-DB**
7104-111983 White
7104-112355 Almond
7104-112218 Bone

PM-4D
Decora insert with 4 hex hole. 6 pcs. Per box. **Not used with PM-DB**
7104-111990 White
7104-112362 Almond
7104-112225 Bone

PM-6D*
Decora insert with 6 hex holes. 6 pcs. Box. Not used with PM-DB.
7104-112003 White
7104-112379 Almond
7104-112232 Bone

PM-8D*
Decora insert with 8 hex holes. 6 pcs. Per box.
Not used with PM-DB.
7104-112010 White
7104-112386 Almond
7104-112249 Bone

PlateMate Decora Wall Plates

ACRP-26
Pack of 25.
7105-451003 White
7105-451041 Almond
7105-451010 Bone
7105-451027 Black
7105-451058 Brown
Shipping 1 lbs 4oz (.58kg)

ACRP-262
Pack of 25
7105-451065 White
7105-113802 Almond
7105-451072 Bone
7105-451089 Black
7105-114700 Brown
Shipping Weight 2 oz (.05 kg)



ACRP-263
Sold Individually.
7105-451126 White
7105-115691 Almond
7105-451133 Bone
7105-119514 Black
7105-115622 Brown
Shipping Weight 2 oz (.05 kg)

PlateMate Decora Wall Plates



ACRP-264
Sold Individually.
7105-451188 White
7105-119521 Almond
7105-451195 Bone
7105-451201 Black
7105-119538 Brown
Shipping Weight 2 oz (.05 kg)



ACRP-265
Sold Individually.
7105-451249 White
7105-451287 Almond
7105-451256 Bone
7105-119545 Black
7105-119552 Brown
Shipping Weight 3 oz (.09 kg)

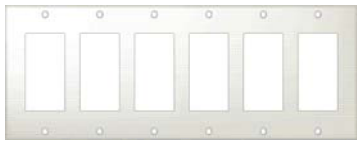

ACRP-266
Sold Individually
7105-451300 White
7105-119569 Almond
7105-451317 Bone
7105-115707 Black
7105-114717 Brown
Shipping Weight 3 oz (.09 kg)

PlateMate®

Decora Screwless Cover Plates

SWP-1
7106-115615 White
7106-114267 Almond
7106-526992 Black
Shipping Weight 2oz (.071kg)

SWP-2
7106-114274 White
7106-114281 Almond
7106-531040 Black
Shipping Weight 2oz (.071kg)

SWP-S21
Two gang + single gang
7106-526831 White
7106-528439 Almond
7106-528477 Bone
7106-528491 Black
7106-528484 Brown
Shipping Weight 2oz (.071kg)



SWP-3
7106-115301 White
7106-115431 Almond
Shipping Weight 3oz (.10kg



SWP-4
7106-115677 White
7106-115448 Almond
Shipping Weight 3.5oz (.11kg)

Stainless Steel
7106-526480: SWP-1.SS
Shipping Weight 2oz (.071kg)



Stainless Steel
7106-526497: SWP-2.SS
Shipping Weight 2oz (.071kg)



Brushed Aluminum
2500-530531: Br. Aluminum
Shipping Weight 2oz (.071kg)



Stainless Steel
7106-526503: SWP-3.SS
Shipping Weight 3.5oz (.11kg)



Stainless Steel
7106-526510: SWP-4.SS
Shipping Weight 3.5oz (.11kg

Plastic Work Boxes–New Construction

Single Gang, 18 inches³ Work box
Captive mounting nails.Two Quick Click® entries for each end. 2.0625" W x 2.875" H x 3.125" D (52.4 x 73.1 x 79.4 mm). 4oz (.1kg)
7200-450075: S1-18-R

Single Gang, 22 inches³ Work box
Single gang captive mounting nails.Two Quick Click® entries for each end. 2.0625" W x 2.9375" H x 3.4375" D (52.4 x 74.7 x 87.4 mm).
7200-114694: S1-22-R
Shipping weight 5oz (.1kg)

Double Gang Work box
Double gang captive mounting nails. Four Quick Click® entries for each end. 3.8125" W x 2.9375" H x 3.0625" D (96.9 x 74.7 x 77.8 mm).
7200-450082: S2-35-RAC
Shipping Weight 5oz (.1kg)

Triple Gang Work box
Triple gang captive mounting nails. Six Auto Clamps® for each end. 5.875" W x 2.9375" H x 3.125" D (149.3 x 74.7 x 79.4 mm).
7200-450099: S3-54-RAC
Shipping weight 7oz (.2kg)

UL Classified and ICBO Recognized. Quick Click® and Auto Clamp are registered trademarks of the Pass and Seymour/ Legrand Corporation. Note: All Work Boxes must be purchased in 10 piece lots.

Plastic Work Boxes – Retrofit

S1-18-W
Single gang with two Auto Clamps®. Two Quick Click® entries for each end. 2.0625" W x 2.875" H x 3.125" D (52.4 x 73.1 x 79.4 cm)
7200-450051: S1-18-W
Shipping Weight 4oz (.1kg)

S2-32-W
Double gang with four Auto Clamps®. Four Quick Click® entries for each end. 3.875" W x 2.9375" H x 3.125" D (98.5 x 74.7 x 79.4 cm)
7200-450068: S2-32-W
Shipping Weight 5oz (.1kg)

P-Rings – Retrofit



1 gang p-ring
2.5" W x 4.25" H x 1.5" D (63.5 x 108 x 38.1 mm)
7200-119576: CADMP1P
Shipping Weight 1oz (.05kg)

2 gang p-ring
4.25" W x 4.25" H x 1.5" D (108 x 108 x 38.1 mm)
7200-119583: CADMPAL2
Shipping Weight 1oz (.05kg)

3/4 (cut-away partitions) gang p-ring
7.875" W x 4.25" H x 1.5" D (201 x 108 x 38.1 mm)
7200-119590: CADMP34P
Shipping Weight 1oz (.05kg)

PlateMate Modular Connectors

MOD-VB

Premium gold plated RCA. Converts video signal from RCA to CAT-5 cable. works upto 2200' Sold in pairs.

7103-121876
Shipping Weight 2 oz (.05 kg)



MOD-F2F

Premium gold plated female F to F connectors with modular bracket. 12 Pcs. Per box. For use with PM-MOD wall plates.

7103-111358: White
7103-111587: Bone
7103-120336: Almond
Shipping Weight 5 oz (.1 kg)

MOD-RJ45CAT5

RJ-45 modular telephone Jack with CAT-5 Connector. Gold plated. 6 Pcs. Per Box. For Use With PM-MOD wallplates

7103-111365: White
7103-111594: Bone
7103-120312: Almond
Shipping Weight 2 oz (.05 kg)

MOD-RJ11

RJ11 Telephone Jack (6 Wire) gold plated. 6 Pcs. Per box for use with PM-MOD wall plates.

7103-111372: White
7103-111600: Bone
7103-120329: Almond
Shipping Weight 2 oz (.05 kg)



PM-BP

Premium heavy duty gold plate 5-way binding posts.
12 Pair Per Box.
(12 Red and 12 Black)

7103-111822
Shipping Weight 9 oz (.25 kg)



PM-BJ

Premium gold plated Banana Jacks. 12 Pair Per Box. (12 Red and 12 Black)

7103-111839
Shipping Weight 9 oz (.25 kg)

PM-SB

Premium gold plated banana plugs with threaded insert.
6 Pair per box.
(6 Red and 6 Black)

7103-115523
Shipping Weight 4.5 oz (.1 kg)



PM-DB

Premium gold plated double banana plugs with threaded insert. 6 Pcs. Per Box.

7103-112423
Shipping Weight 6 oz (.17 kg)



PM-RCA

Premium gold plated RCA jack-rear solder tab.
12 Pcs. Per box.

7103-112317: Yellow
7103-112089: White
7103-111846:Red
Shipping Weight 3.5 oz (.1 kg)



PM-RCA2

Premium gold plated RCA Jack to RCA jack.
12 Pcs. Per Box

7103-112416: Yellow
7103-112409: White
7103-112393: Red
Shipping Weight 3.5 oz (.1 kg)



PM-RCAF

Premium Gold Plated RCA Jack to F-connectors.
12 Pcs. Per Box

7103-112324: Yellow
7103-112096: White
7103-111853: Red
7103-521355: Green
7103-521348: Blue
Shipping Weight 3 oz (.09 kg)

PM-FF

Premium Gold Plated Female F to F connectors.
12 Pcs. Per Box.

7103-111860
Shipping Weight 3.5 oz (.1 kg)

Misc... Workboxes

UK Single Gang Metal Workbox
47 mm deep metal UK style back box for use with A-KP-EU
7200-521492



Grey Single Gang, Surface Mount Workbox
Allows single gang devices to be mounted on wall.
53mm deep. **Call for special order in White finish.**
7200-526701



Double Gang Arlington Ring
Low voltage double gang ring style mounting P-ring.
7200-521493



Grey Double Gang, Surface Mount Workbox
Allows double gang devices to be mounted on wall.
53mm deep. **Call for special order in White finish.**
7200-521133

Outdoor Thermoplastic Covers

Vertical, Single Gang Thermoplastic Cover
Self-closing cover with 3/8" gasket and 2 mounting screws.
Mounts to single-gang box not included.
3.0625" W x 4.8125"H x 1.1875"D (77.8 x 122.4 x 30.2 mm)
9000-450020: WPB 37-23
Shipping Weight 9oz (.3kg)

Vertical, Single Gang Thermoplastic Cover
Same as above except mounts to flat surface with 4 screws.
3.0625" W x 4.8125 H x 1.1875" D (77.8 x 122.3 x 30.2 mm)
9000-450037: WPB 37-23FS
Shipping Weight 9oz (.3kg)

Horizontal, Single Gang Thermoplastic Cover
Horizontal self-closing cover with 3/32" gasket and 2 mounting screws. Mounts to single-gang box.
4.9375" W x 2.875" H x 1.6875" D (125.5 x 73.1 x 42.9 mm)
9000-450006: WPB 37-03
Shipping Weight 9oz (.3kg)

Horizontal, Single Gang Thermoplastic Cover
Same as above except mounts to flat surface with 4 screws.
4.9375" W x 2.875" H x 1.75" D (125.5 x 73.1 x 44.5 mm)
9000-450013: WPB 37-03FS
Shipping Weight 9oz (.3kg)



Clear, Double Gang Thermoplastic Cover
7200-521157: E9U2CRN
Surface mount grey weather proof outdoor cover. Allows double gang device to be mounted outside.
Workbox not included.



Grey, Double Gang Thermoplastic Cover
7200-521164: E9U2GRN
Double gang, surface mount grey weather proof outdoor cover. Allows double gang device to be mounted outside.
Workbox not included.

System Accessories

AC 12-Volt Trigger

120 VAC - 12-Volt DC triggered outlet with resettable circuit breaker. Switches up to 10 amps. 3.75" W x 2" H x 5" D (9.5 x 5.1 x 12.7 cm)
Not for sale in countries with RoHS requirements

9500-115592: ACT-1 US
9500-114298: ACT-1 UK
Shipping Weight 1 lbs. (.45 kg)

MSRP
$89.00

Dealer
$51.00



Speaker to line-level adapter

Recommended for use with CAA66 and CAM6.6 to obtain line level outputs for zones without pre-amp outputs. Color-coded detachable 14-gauge snap connectors. 3.375" W x 1" H x 2.5" D (8.6 x 2.6 x 6.4 cm)

9500-200891: ADP-1.2
Shipping Weight 14 oz (.4 kg)

MSRP
$39.00

Dealer
$20.00



110 Patch Plug

Two pieces, sold in quantities of 10 per pack.

8200-526756: S110P4

MSRP
$130.00

Dealer
$65.00

Speaker relay module

Share speakers between controllers and home theater. Add 12-VDC automatic A/B switching, speaker level, between CA amplifier and local amplifier. 1.3125" W x 2.5" H x 1.875" D (33.5 x 63.5 x 48 mm) **Wall plates not included with keypads.**

1200-115585: White SRM-2.1
1200-114021: Almond SRM-2.1
Shipping Weight 4 oz (.11 kg)

MSRP
$99.00

Dealer
$54.45

Snap Connectors

(4) Snap connectors

9590-531774: SC4P

Shipping Weight
1 lbs (.5kg)

MSRP
$15.00

Dealer
$7.50

Data and Speaker Cable

2Conductor, 16 gauge Speaker Cable

Unshielded, 26/30 strands bare copper, .024 nominal PVC jacket, temp. rating 75° C, UL type CL3, Light Blue Jacket. 1000 foot pull-box only.

9000-119316: AW162CL3

Call For Pricing



4 Pair Twisted, 24 Gauge, CAT-5E Cable

Solid copper, PVC jacket, telephone/data grade/ISDN. Zipcord with 4 conductor, 16 gauge speaker cable. 500 foot spool. PINK jacket.

9000-121838: AW164C5

Call For Pricing

4 Conductor, 22 Gauge Signal/Data Cable

2 pair twisted w/shield, 19/34 tinned copper, PVC jacket, temp. Rating 75° C, UL Type CL3, White jacket. 1000 foot pull-box only. Conducts sensitive IR signals and shields them from outside noise.

9000-115240: AW2260AB

Call For Pricing

8 Conductor, 24 Gauge CAT-5E Cable

4 pair twisted, solid copper, PVC jacket, telephone/data grade/ISDN, GRAY jacket. 1000 Foot pull-box only.

9000-119323: AWCAT5

Call For Pricing

4 Conductor, 16 Gauge Speaker Cable

Unshielded, 26/30 strands bare copper, .024 nominal PVC jacket, temp. rating 75° C, UL Type CL3, Yellow Jacket. 500 foot pull-box only.

9000-460067: AW164CL3

Call For Pricing

Warranty

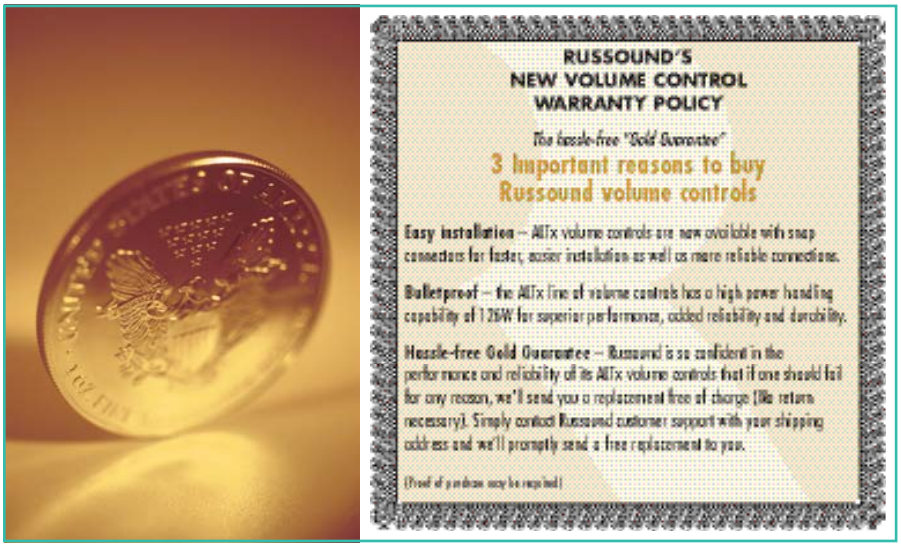
RUSSOUND'S
NEW VOLUME CONTROL
WARRANTY POLICY
The hassle-free "Gold Guarantee"
3 important reasons to buy
Russound volume controls
Easy installation – ALTx volume controls are now available with snap connectors for faster, easier installation as well as more reliable connections.
Bulletproof – the ALTx line of volume controls has a high power handling capability of 125W for superior performance, added reliability and durability.
Hassle-free Gold Guarantee – Russound is so confident in the performance and reliability of its ALTx volume controls that if one should fail for any reason, we'll send you a replacement free of charge (No return necessary). Simply contact Russound customer support with your shipping address and we'll promptly send a free replacement to you.
(Proof of purchase may be required)

PRODUCT CATEGORY WARRANTY

ONE YEAR LIMITED WARRANTY:
- SMS3 SMART MEDIA SERVER

TWO YEAR LIMITED WARRANTY:
- IBRIDGE DOCK, IBRIDGE POWER DOCK, IBRIDGE BAY
- SMART TUNERS (ST2, ST2S, ST2-XM, ST2-XM2)
- COLLAGE (CAK1, CMM1)
- C-SERIES (MCA-C5, MDK-C5)
- CAV/CAM (CAV6.6, CAM6.6, UNO-S2, UNO-S1, UNO-TS2, UNO-TS2D)
- CAA/CAS (CAS44, CAA66, KP4, KP6, KPL, KPSC, SRM-2.1, ADP-1)
- CA4 (CA4, CA4-WP, CA4-KP)
- A-BUS (A-KP2, A-H1,A-H4, A-H4P, A-H4D, A-H2, A-H484, A-PS, A-LC2, A-LRC1, A-VC2, A-H4DX, A-OM)
- COMPOINT (ISK1, ISK2, ISK3, ISSP, ISH1, ISDR1, ISPS)
- R-SERIES AMPLIFIERS (R235LS, R290DS, R850MC, R1250MC)
- VIDEO DISTRIBUTION (CRX, CTX , HDRX, HDTX, VM1, WMR1, HDMIX)
- SAPHIR PRODUCTS
- ACCESSORIES (ACT-1,EZB, ADP-1.2, EXB-1SC, EXB-2SC, SA-ZX3, SRC1, SCR2, SRM-2.1)

FIVE YEAR LIMITED WARRANTY:
- RATIO, OUTBACK, AND OUTBACK ROCK SPEAKERS

TEN YEAR LIMITED WARRANTY:
- SPEAKER SELECTORS AND IMPEDANCE MATCHING DEVICES (SS, PRO, SDB, AB)

LIMITED LIFETIME WARRANTY :
- VOLUME CONTROLS (ALTX, LPTX, WALTX2, TBL)
- ACCLAIM 5 AND 7 SERIES SPEAKERS
- FLEXBOX SPEAKER BACK BOXES

RETURNS AND WARRANTY POLICY

Russound sells products only through authorized Dealers and Distributors to ensure that customers obtain proper support and service. Any Russound product purchased from an unauthorized dealer or other source, including retailers, mail order sellers and online sellers will not be honored or serviced under existing Russound warranty policy. Any sale of products by an unauthorized source or other manner not authorized by Russound shall void the warranty on the applicable product.

Returns must be authorized and be accompanied with an R.A. number and a copy of the proof of purchase.

A 15% restocking charge may apply. Any returns for repair found to be non-defective may result in a fifty dollar minimum charge. Any product returned without a Return Authorization Number will be returned at dealer expense.

For further warranty information, see Russound product manuals.

Prices and specifications subject to change without notice. Russound is not responsible for typographical errors. E. & O. E. Decora® is a registered trademark of Leviton Corporation. A-BUS® is a registered trademark of LeisureTech Pty Ltd Australia. iPod, iTouch and iPad are trademarks of Apple, Inc., registered in the U.S. and other countries.

COMPLIANCE AND CERTIFICATION

Russound products that carry these logos meet standards and are compliant to safety and emissions regulations mandated by these agencies. Declarations of conformity are available upon request.

Conforms to UL60065
Certified to CAN/CSA IEC60065

CONFORMS TO US STD

C US
C22.2 No. 60065-4-08

Russound
5 Forbes Road, Newmarket, NH 03857, USA
www.russound.com | Tel 603.659.5170 | Fax 603.659.5388
Contact: sales@russound.com
08.13.10

Dealer Catalog Literature Number – LR9910-0006

The Russound Pledge

Speak to a real person
We believe in personal attention and have real people to answer your calls during business hours. And Russounders don't hide behind voice mail.

Answers and solutions
We promise to do our utmost to satisfy your needs on the first contact or with a return response that very day. We make it our priority to answer your question and resolve issues in a prompt and courteous manner.

Inventory
We offer a complete product line and maintain a deep inventory of items. In fact, 97% of all orders are shipped complete.

Same day shipping
Orders placed by 2:00 PM EST will be shipped that day.
The shipping status with tracking number will be confirmed to you via e-mail that same day.
(International shipments do not apply)

Knowledge
Knowledgeable Sales personnel that are fast, fun and friendly to work with.The best tech support in the business, from 8:30 am to 7:00 PM (EST), Monday through Friday.

Education
Dedicated professional regional trainers and comprehensive educational programs.

E-friendly
E-mail us or visit our website for up-to-date sales and technical information 24/7 at www.Russound.com.

Product Integrity
Russound backs all of its products with quality and a no nonsense warranty. We'll do whatever it takes to make a situation right. For extra peace of mind, Russound obtains all applicable safety approvals for our products, even when they're not required.

Courtesy
We treat everyone with courtesy, dignity and respect.
And that means everyone.

Our primary goal is to establish a long-lasting, mutually beneficial relationship.